

sanitube™

Stainless Steel Tube, Valves and Fittings

PRODUCT CATALOG



Distributed By:

Welcome to Sanitube™, the leading manufacturer of sanitary-grade stainless steel tube, valves, and fittings. Sanitube products are precision engineered to meet 3A specifications and to withstand the most challenging operating environments in the food, dairy, beverage, cosmetic, pharmaceutical, and industrial markets. Sanitube's Central Florida campus spans five buildings comprising over 100,000 square feet of enclosed production and warehousing space in Lakeland, Florida. In addition, our distribution centers in Kansas City, Missouri and Los Angeles, California provide our distributors with even better access to our products throughout North and South America. Our growth is driven by our commitment to providing superior product availability, service, and quality to our customers. Offering comprehensive solutions ranging from butterfly and ball valve automation to custom fitting fabrication and polishing, Sanitube provides distributors with a single source for not only standard sanitary tubing, valves, and fittings, but also made-to-order spool pieces, unique fitting configurations, cut to length tubing, as well as polished industrial pipe.

Utilization of modern, technologically advanced welding and fabrication equipment allows Sanitube to manufacture the highest quality sanitary fittings available, with efficiency unmatched by competitors. Higher efficiency allows for superior product availability, traceability, quality, pricing, and one of the lowest lead times in the industry. Every Sanitube product is manufactured in accordance with strict quality control procedures, and all Sanitube products are backed by our limited warranty.

In addition to reviewing this catalog, we urge you to log on to our website: www.sanitube.us. There you can access additional product specifications and other useful information.

Sanitube's product lines are constantly expanding, so be sure to check our website often for new items and sizes. If you can't find what you're looking for, just give us a call toll-free at 855-300-TUBE (8823). Knowledgeable Sanitube representatives are standing by to assist you.

Thank you for your interest in Sanitube. We look forward to serving all of your sanitary stainless steel tube, valve, and fittings needs.



Todd Adams
President
Sanitube

Tube

Polished Sanitary Tube.....	6
Bright Annealed Tube.....	7
Polished Pipe.....	8

Tube OD Weld Fittings

90° Elbows.....	10
Short Tees.....	11
Long Tees.....	12
45° Elbows.....	12
Concentric Reducers.....	14
Eccentric Reducers.....	15
Reducing Tees.....	16
Stub Ends.....	17
End Caps.....	17
Adapters.....	18
Laterals.....	19
Wyes.....	19
Crosses.....	20
180° Return Bends.....	20
Sweeps.....	21

Clamp Fittings

Ferrules.....	24
Hose Adapters.....	26
Thermometer Caps.....	28
Rubber Hose Adapters.....	29
Clamps.....	30
Caps.....	31
90° Elbows.....	31
Straight Tees.....	33
45° Elbows.....	36
Concentric Reducers.....	37
Eccentric Reducers.....	38
Reducing Tees.....	39
Adapters.....	41

Laterals.....	44
Wyes.....	45
180° Return Bends.....	45
Crosses.....	46
Spool Assemblies.....	46
Sight Glasses.....	47
Gaskets.....	47

Bevel Seat Fittings

Ferrules.....	49
Hex Nuts.....	50
End Caps.....	50
Gaskets.....	51
90° Elbows.....	51
45° Elbows.....	53
Concentric Reducers.....	54
Eccentric Reducers.....	56
Tank Ferrules.....	57
Hose Adapters.....	58
Threaded Adapters.....	59
Straight Tees.....	60

I-Line Fittings

Ferrule.....	63
Clamps.....	64
90° Elbows.....	65

Hangers

Tube Hangers.....	67
Pipe Hangers.....	68

Spray Balls.....	69
-------------------------	-----------

Sani-Flow Pressure Gauges.....	70
---------------------------------------	-----------

King Nipples.....	71
--------------------------	-----------

Plate Flanges

Tube Flanges..... 72

Pipe Flanges..... 73

Custom Fabrication..... 74**Jacketed Fittings..... 75****Sanitary Valves**

Buttweld Butterfly Valves..... 77

Clamp Butterfly Valves..... 78**Actuated Clamp Butterfly Valves..... 80****Clamp Ball Valves..... 81****Check Valves..... 83****Industrial Valves**


Ball Valves

Threaded..... 86

Socket Weld..... 89

Part Code Cross Reference Chart..... 90**Compound Selection Guide..... 94****Part Number Index..... 102****Limited Warranty..... 104**

Polished Tubing General Service Tubing Polished Pipe

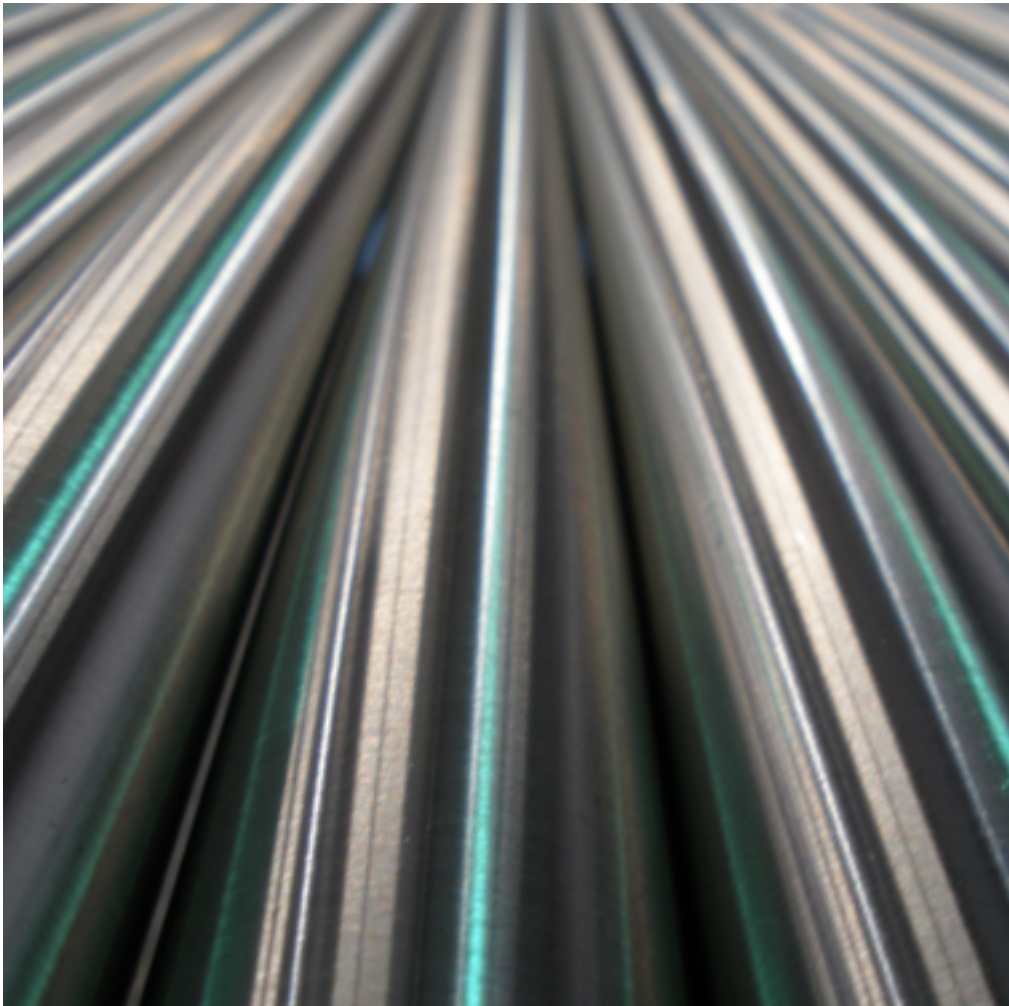

Product Overview

Sanitube's polished tube is manufactured in accordance with ASTM A270 and 3A sanitary standards. Our tubing is made from cold rolled stainless steel strip whose chemical elements are enhance weldability. The weld bead is cold-worked to a full finished condition, resulting in a virtually undetectable longitudinal weld. Annealing in a controlled atmosphere follows to preserve maximum structural integrity. The tubes are then mechanically polished to a 180 grit (20 μ -in. Ra maximum) interior and 150 grit (32 μ -in. Ra maximum) exterior finish via Sanitube's state-of-the-art process. Tubes are then line-stenciled with OD, wall, ASTM specifications, grade, and heat number.

ASTM A270



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304L	316L	Wall	ID	Gauge	
1/2"	A270P-4050	A270P-6050	0.065	0.370	16	0.5
3/4"	A270P-4075	A270P-6075	0.065	0.620	16	0.5
1 "	A270P-4100	A270P-6100	0.065	0.870	16	0.7
1-1/2"	A270P-4150	A270P-6150	0.065	1.370	16	1.0
2 "	A270P-4200	A270P-6200	0.065	1.870	16	1.3
2 "	A270P-4201	A270P-6201	0.120	1.760	11	2.5
2-1/2"	A270P-4250	A270P-6250	0.065	2.370	16	1.7
3 "	A270P-4300	A270P-6300	0.065	2.870	16	2.2
3 "	A270P-4301	A270P-6301	0.120	2.760	11	3.7
4 "	A270P-4403	--	0.065	3.870	16	3.4
4 "	A270P-4400	A270P-6400	0.083	3.834	14	2.8
4 "	A270P-4401	A270P-6401	0.120	3.760	11	5.1
5 "	A270P-4500	A270P-6500	0.083	4.834	14	4.4
6 "	A270P-4600	--	0.083	5.834	14	5.2
6 "	A270P-4601	A270P-6601	0.109	5.782	12	6.9
8 "	A270P-4801	A270P-6801	0.109	7.782	12	9.3
10 "	A270P-41001	A270P-1001	0.109	9.782	12	11.6
12 "	A270P-41201	A270P-61201	0.109	11.782	12	14.0
14 "	A270P-41400	A270P-61400	0.188	13.624	7	27.7

Notes:

- ID or OD only polish and custom finishes up to 15Ra (mechanical) available.
- Call Sanitube Sales for full freight allowance details.
- Cut to length available.

ASTM A249/A269

Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304L	316L	Wall	ID	Gauge	
1 "	A269-4100	A269-6100	0.065	0.870	16	0.7
1-1/2"	A269-4150	A269-6150	0.065	1.370	16	1.0
2 "	A269-4200	A269-6200	0.065	1.870	16	1.3
2-1/2"	A269-4250	A269-6250	0.065	2.370	16	1.7
3 "	A269-4300	A269-6300	0.065	2.870	16	2.2
4 "	A269-4403	--	0.065	3.870	16	2.8
4 "	A269-4400	A269-6400	0.083	3.834	14	3.4
5 "	A269-4500	A269-6500	0.083	4.834	14	4.4
6 "	A269-4600	A269-6600	0.083	5.834	14	5.2
6 "	A269-4601	A269-6601	0.109	5.782	12	6.9
8 "	A269-4800	A269-6800	0.083	7.834	14	6.9
8 "	A269-4801	A269-6801	0.109	7.782	12	9.3



Notes:

- 20' Lengths Only
- Packaging Included.
- Cut to length available.

SOLD IN SQUARE PACK BUNDLE QUANTITIES ONLY

Size (Tube OD)	Piece Count	Total Footage
1 "	86	1720
1-1/2"	53	1060
2 "	43	860
2-1/2"	33	660
3 "	23	460
4 "	18	360
6 "	8	160
8 "	5	160

Polished Welded & Seamless Pipe



TUBING

Size (Tube OD)	Schedule 10		Schedule 40	
	304L	316L	304L	316L
1/2 "	A312P1-4050	A312P1-6050	A312P4-4050	A312P4-6050
3/4 "	A312P1-4075	A312P1-6075	A312P4-4075	A312P4-6075
1 "	A312P1-4100	A312P1-6100	A312P4-4100	A312P4-6100
1-1/4 "	A312P1-4125	A312P1-6125	A312P4-4125	A312P4-6125
1-1/2 "	A312P1-4150	A312P1-6150	A312P4-4150	A312P4-6150
2 "	A312P1-4200	A312P1-6200	A312P4-4200	A312P4-6200
2-1/2 "	A312P1-4250	A312P1-6250	A312P4-4250	A312P4-6250
3 "	A312P1-4300	A312P1-6300	A312P4-4300	A312P4-6300
4 "	A312P1-4400	A312P1-6400	A312P4-4400	A312P4-6400
6 "	A312P1-4600	A312P1-6600	A312P4-4600	A312P4-6600
8 "	A312P1-4800	A312P1-6800	A312P4-4800	A312P4-6800
10 "	A312P1-41000	A312P1-61000	A312P4-41000	A312P4-61000
12 "	A312P1-41200	A312P1-61200	A312P4-41200	A312P4-61200


Notes:

- Polished Pipe available up to 20 foot max lengths.
- Polished Pipe offered with 180, 240, or 320 grit finish according to customer requirements.
- OD Polishing available 1/2" through 12".
- ID Polishing available 5" through 14".
- Polished A403 weld fittings available. Inquire with your Sanitube sales representative.
- Polished Pipe is polysleeved and tri-wall boxed for shipment.
- Polished Pipe only ships via truck.
- We are unable to accept returned pipe.

Tube OD Weld Fittings




Polished Short 90° Elbows



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	R	Wall	
1/2 "	2WC4P-050	2WC6P-050	1.125	1.125	0.065	0.03
3/4 "	2WC4P-075	2WC6P-075	1.125	1.125	0.065	0.08
1 "	2WC4P-100	2WC6P-100	1.500	1.500	0.065	0.13
1-1/2 "	2WC4P-150	2WC6P-150	2.250	2.250	0.065	0.29
2 "	2WC4P-200	2WC6P-200	3.000	3.000	0.065	0.52
2-1/2 "	2WC4P-250	2WC6P-250	3.750	3.750	0.065	0.87
3 "	2WC4P-300	2WC6P-300	4.500	4.500	0.065	1.53
4 "	2WC4P-400	2WC6P-400	6.000	6.000	0.083	2.85
6 "	2WC4P-600	2WC6P-600	9.000	9.000	0.109	8.53
8 "	2WC4P-800	2WC6P-800	12.000	12.000	0.109	15.25
10 "	2WC4P-1000	2WC6P-1000	15.000	15.000	0.109	17.89
12 "	2WC4P-1200	2WC6P-1200	18.000	18.000	0.109	19.19

BUTT WELD FITTINGS

Polished 90° Elbows with Tangents



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	R	Wall	
1/2 "	--	L2S6P-050	3.000	1.125	0.065	0.08
3/4 "	--	L2S6P-075	3.000	1.125	0.065	0.08
1 "	L2S4P-100	L2S6P-100	2.062	1.500	0.065	0.12
1-1/2 "	L2S4P-150	L2S6P-150	2.937	2.250	0.065	0.38
2 "	L2S4P-200	L2S6P-200	4.062	3.000	0.065	0.56
2-1/2 "	L2S4P-250	L2S6P-250	5.187	3.750	0.065	1.00
3 "	L2S4P-300	L2S6P-300	6.312	4.500	0.065	1.50
4 "	L2S4P-400	L2S6P-400	8.312	6.000	0.083	4.20
6 "	L2S4P-600	L2S6P-600	11.250	9.000	0.109	11.20

Automatic Weld 90° Elbows



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	Wall	
1 "	--	AW2S6P-100	3.000	0.065	0.17
1-1/2 "	--	AW2S6P-150	3.750	0.065	0.37
2 "	--	AW2S6P-200	4.750	0.065	0.70
2-1/2 "	--	AW2S6P-250	5.500	0.065	1.22
3 "	--	AW2S6P-300	6.250	0.065	1.54
4 "	--	AW2S6P-400	8.000	0.083	3.81




Polished Short Tees



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	Wall	
1/2 "	--	7WS6P-050	1.500	0.750	0.065	0.04
3/4 "	--	7WS6P-075	2.750	1.375	0.065	0.11
1 "	7WS4P-100	7WS6P-100	2.250	1.125	0.065	0.15
1-1/2 "	7WS4P-150	7WS6P-150	3.312	1.656	0.065	0.33
2 "	7WS4P-200	7WS6P-200	4.124	2.062	0.065	0.55
2-1/2 "	7WS4P-250	7WS6P-250	4.688	2.344	0.065	0.74
3 "	7WS4P-300	7WS6P-300	5.188	2.594	0.065	0.93
4 "	7WS4P-400	7WS6P-400	6.876	3.438	0.083	2.15




Polished Long Tees



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	Wall	
1/2 "	--	7WL6P-050	3.750	1.875	0.065	0.21
3/4 "	--	7WL6P-075	3.750	1.875	0.065	0.21
1 "	7WL4P-100	7WL6P-100	3.750	1.875	0.065	0.29
1-1/2 "	7WL4P-150	7WL6P-150	4.500	2.250	0.065	0.48
2 "	7WL4P-200	7WL6P-200	6.000	3.000	0.065	1.05
2-1/2 "	7WL4P-250	7WL6P-250	6.000	3.000	0.065	1.05
3 "	7WL4P-300	7WL6P-300	6.500	3.250	0.065	1.36
4 "	7WL4P-400	7WL6P-400	7.750	3.875	0.083	2.68
6 "	7WL4P-600	7WL6P-600	11.250	5.625	0.109	7.62
8 "	7WL4P-800	7WL6P-800	14.000	7.000	0.109	11.09

BUTT WELD FITTINGS

Polished Short 45° Elbows




Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	R	Wall	
1/2 "	--	2WK6P-050	0.466	1.125	0.065	0.04
3/4 "	--	2WK6P-075	0.466	1.125	0.065	0.04
1 "	2WK4P-100	2WK6P-100	0.625	1.500	0.065	0.08
1-1/2 "	2WK4P-150	2WK6P-150	0.937	2.250	0.065	0.15
2 "	2WK4P-200	2WK6P-200	1.250	3.000	0.065	0.26
2-1/2 "	2WK4P-250	2WK6P-250	1.562	3.750	0.065	0.44
3 "	2WK4P-300	2WK6P-300	1.875	4.500	0.065	0.77
4 "	2WK4P-400	2WK6P-400	2.500	6.000	0.083	1.43
6 "	2WK4P-600	2WK6P-600	3.750	9.000	0.109	4.26
8 "	2WK4P-800	2WK6P-800	5.000	12.000	0.109	7.85
10 "	2WK4P-1000	2WK6P-1000	6.250	6.250	0.109	8.95
12 "	2WK4P-1200	2WK6P-1200	7.500	7.500	0.109	9.60

Polished 45° Elbows with Tangents




Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	Wall	Wall	
1/2"	--	L2KS6P-050	3.000	1.125	0.065	0.08
3/4"	--	L2KS6P-075	3.000	1.125	0.065	0.08
1 "	L2KS4P-100	L2KS6P-100	1.188	1.500	0.065	0.14
1-1/2"	L2KS4P-150	L2KS6P-150	1.625	2.250	0.065	0.30
2 "	L2KS4P-200	L2KS6P-200	2.312	3.000	0.065	0.50
2-1/2"	L2KS4P-250	L2KS6P-250	3.000	3.750	0.065	0.80
3 "	L2KS4P-300	L2KS6P-300	3.688	4.500	0.065	1.16
4 "	L2KS4P-400	L2KS6P-400	4.812	6.000	0.083	2.57
6 "	L2KS4P-600	L2KS6P-600	6.750	9.000	0.109	9.08




Automatic Weld 45° Elbows



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	Wall	
1 "	--	AW2KS6P-100	2.250	0.065	0.13
1-1/2"	--	AW2KS6P-150	2.500	0.065	0.26
2 "	--	AW2KS6P-200	3.000	0.065	0.45
2-1/2"	--	AW2KS6P-250	3.375	0.065	0.79
3 "	--	AW2KS6P-300	3.625	0.065	1.16
4 "	--	AW2KS6P-400	4.500	0.083	2.57




Polished Concentric Reducers



BUTT WELD FITTINGS


Size (Tube OD)	Part Number		Dimensions				Weight (lbs.)
	304	316L	A	B	C		
3/4" x 1/2"	--	31W6P-075050	1.000	0.750	0.500	0.065	0.04
1" x 1/2"	--	31W6P-100050	2.000	1.000	0.500	0.065	0.06
1" x 3/4"	--	31W6P-100075	1.000	1.000	0.750	0.065	0.05
1-1/2" x 1/2"	--	31W6P-150050	4.000	1.500	0.500	0.065	0.22
1-1/2" x 3/4"	--	31W6P-150075	2.000	1.500	0.750	0.065	0.22
1-1/2" x 1"	31W4P-150100	31W6P-150100	2.000	1.500	1.000	0.065	0.14
2" x 1/2"	31W4P-200050	31W6P-200050	6.000	2.000	0.500	0.065	0.43
2" x 3/4"	31W4P-200075	31W6P-200075	5.000	2.000	0.750	0.065	0.40
2" x 1"	31W4P-200100	31W6P-200100	4.000	2.000	1.000	0.065	0.36
2" x 1-1/2"	31W4P-200150	31W6P-200150	2.000	2.000	1.500	0.065	0.22
2-1/2" x 1"	31W4P-250100	31W6P-250100	6.000	2.500	1.000	0.065	0.71
2-1/2" x 1-1/2"	31W4P-250150	31W6P-250150	4.000	2.500	1.500	0.065	0.59
2-1/2" x 2"	31W4P-250200	31W6P-250200	2.000	2.500	2.000	0.065	0.29
3" x 1"	31W4P-300100	31W6P-300100	8.000	3.000	1.000	0.065	1.60
3" x 1-1/2"	31W4P-300150	31W6P-300150	6.000	3.000	1.500	0.065	0.91
3" x 2"	31W4P-300200	31W6P-300200	4.000	3.000	2.000	0.065	0.69
3" x 2-1/2"	31W4P-300250	31W6P-300250	2.000	3.000	2.500	0.065	0.35
4" x 1"	31W4P-400100	31W6P-400100	--	4.000	1.000	0.083	2.35
4" x 1-1/2"	31W4P-400150	31W6P-400150	--	4.000	1.500	0.083	2.11
4" x 2"	31W4P-400200	31W6P-400200	8.000	4.000	2.000	0.083	1.60
4" x 2-1/2"	31W4P-400250	31W6P-400250	6.000	4.000	2.500	0.083	1.34
4" x 3"	31W4P-400300	31W6P-400300	4.000	4.000	3.000	0.083	1.00
6" x 2"	31W4P-600200	31W6P-600200	5.500	6.000	2.000	0.109	1.75
6" x 3"	31W4P-600300	31W6P-600300	5.500	6.000	3.000	0.109	1.60
6" x 4"	31W4P-600400	31W6P-600400	5.500	6.000	4.000	0.109	1.60
8" x 3"	31W4P-800300	31W6P-800300	6.000	8.000	3.000	0.109	3.15
8" x 4"	31W4P-800400	31W6P-800400	6.000	8.000	4.000	0.109	3.15
8" x 6"	31W4P-800600	31W6P-800600	6.000	8.000	6.000	0.109	2.95
10" x 8"	31W4P-1000800	31W6P-1000800	8.000	10.000	8.000	0.109	10.500
12" x 10"	31W4P-12001000	31W6P-12001000	8.000	12.000	10.000	0.109	13.600

Polished Eccentric Reducers



Size (Tube OD)	Part Number		Dimensions				Weight (lbs.)
	304	316L	A	B	C	Wall	
3/4" x 1/2"	--	32W6P-075050	1.000	0.750	0.500	0.065	0.04
1" x 1/2"	--	32W6P-100050	2.000	1.000	0.500	0.065	0.06
1" x 3/4"	--	32W6P-100075	1.000	1.000	0.750	0.065	0.05
1-1/2" x 1/2"	--	32W6P-150050	4.000	1.500	0.500	0.065	0.22
1-1/2" x 3/4"	--	32W6P-150075	3.000	1.500	0.750	0.065	0.22
1-1/2" x 1"	32W4P-150100	32W6P-150100	2.000	1.500	1.000	0.065	0.14
2" x 1/2"	32W4P-200050	32W6P-200050	6.000	2.000	0.500	0.065	0.43
2" x 3/4"	32W4P-200075	32W6P-200075	5.000	2.000	0.750	0.065	0.40
2" x 1"	32W4P-200100	32W6P-200100	4.000	2.000	1.000	0.065	0.36
2" x 1-1/2"	32W4P-200150	32W6P-200150	2.000	2.000	1.500	0.065	0.22
2-1/2" x 1"	32W4P-250100	32W6P-250100	6.000	2.500	1.000	0.065	0.71
2-1/2" x 1-1/2"	32W4P-250150	32W6P-250150	4.000	2.500	1.500	0.065	0.59
2-1/2" x 2"	32W4P-250200	32W6P-250200	2.000	2.500	2.000	0.065	0.29
3" x 1"	32W4P-300100	32W6P-300100	8.000	3.000	1.000	0.065	1.60
3" x 1-1/2"	32W4P-300150	32W6P-300150	6.000	3.000	1.500	0.065	0.91
3" x 2"	32W4P-300200	32W6P-300200	4.000	3.000	2.000	0.065	0.69
3" x 2-1/2"	32W4P-300250	32W6P-300250	2.000	3.000	2.500	0.065	0.35
4" x 1"	32W4P-400100	32W6P-400100	12.000	4.000	1.000	0.083	2.35
4" x 1-1/2"	32W4P-400150	32W6P-400150	10.000	4.000	1.500	0.083	2.11
4" x 2"	32W4P-400200	32W6P-400200	8.000	4.000	2.000	0.083	1.60
4" x 2-1/2"	32W4P-400250	32W6P-400250	6.000	4.000	2.500	0.083	1.34
4" x 3"	32W4P-400300	32W6P-400300	4.000	4.000	3.000	0.083	1.00
6" x 2"	32W4P-600200	32W6P-600200	5.500	6.000	2.000	0.109	1.75
6" x 3"	32W4P-600300	32W6P-600300	5.500	6.000	3.000	0.109	1.60
6" x 4"	32W4P-600400	32W6P-600400	5.500	6.000	4.000	0.109	1.60
8" x 3"	32W4P-800300	32W6P-800300	6.000	8.000	3.000	0.109	3.15
8" x 4"	32W4P-800400	32W6P-800400	6.000	8.000	4.000	0.109	3.15
8" x 6"	32W4P-800600	32W6P-800600	6.000	8.000	6.000	0.109	2.95

Polished Reducing Tees




BUTT WELD FITTINGS

Size (Tube OD)	Part Number		Dimensions					Weight (lbs.)
	304	316L	A	B	C	D	Wall	
3/4" x 1/2"	--	7WRT6P-075050	1.000	0.750	0.500	0.065	0.065	0.04
1" x 1/2"	--	7WRT6P-100050	2.000	1.000	0.500	0.065	0.065	0.06
1" x 3/4"	--	7WRT6P-100075	1.000	1.000	0.750	0.065	0.065	0.05
1-1/2" x 1/2"	--	7WRT6P-150050	4.000	1.500	0.500	0.065	0.065	0.22
1-1/2" x 3/4"	--	7WRT6P-150075	2.000	1.500	0.750	0.065	0.065	0.22
1-1/2" x 1"	7WRT4P-150100	7WRT6P-150100	2.000	1.500	1.000	0.065	0.065	0.14
2" x 1/2"	7WRT4P-200050	7WRT6P-200050	6.000	2.000	0.500	0.065	0.065	0.43
2" x 3/4"	7WRT4P-200075	7WRT6P-200075	5.000	2.000	0.750	0.065	0.065	0.40
2" x 1"	7WRT4P-200100	7WRT6P-200100	4.000	2.000	1.000	0.065	0.065	0.36
2" x 1-1/2"	7WRT4P-200150	7WRT6P-200150	2.000	2.000	1.500	0.065	0.065	0.22
2-1/2" x 1"	7WRT4P-250100	7WRT6P-250100	6.000	2.500	1.000	0.065	0.065	0.71
2-1/2" x 1-1/2"	7WRT4P-250150	7WRT6P-250150	4.000	2.500	1.500	0.065	0.065	0.59
2-1/2" x 2"	7WRT4P-250200	7WRT6P-250200	2.000	2.500	2.000	0.065	0.065	0.29
3" x 1"	7WRT4P-300100	7WRT6P-300100	8.000	3.000	1.000	0.065	0.065	1.60
3" x 1-1/2"	7WRT4P-300150	7WRT6P-300150	6.000	3.000	1.500	0.065	0.065	0.91
3" x 2"	7WRT4P-300200	7WRT6P-300200	4.000	3.000	2.000	0.065	0.065	0.69
3" x 2-1/2"	7WRT4P-300250	7WRT6P-300250	2.000	3.000	2.500	0.065	0.065	0.35
4" x 1"	7WRT4P-400100	7WRT6P-400100	10.000	4.000	1.000	0.083	0.083	2.35
4" x 1-1/2"	7WRT4P-400150	7WRT6P-400150	10.000	4.000	1.500	0.083	0.083	2.11
4" x 2"	7WRT4P-400200	7WRT6P-400200	8.000	4.000	2.000	0.083	0.083	1.60
4" x 2-1/2"	7WRT4P-400250	7WRT6P-400250	6.000	4.000	2.500	0.083	0.083	1.34
4" x 3"	7WRT4P-400300	7WRT6P-400300	4.000	4.000	3.000	0.083	0.083	1.00
6" x 2"	7WRT4P-600200	7WRT6P-600200	5.500	6.000	2.000	0.109	0.109	1.75
6" x 3"	7WRT4P-600300	7WRT6P-600300	5.500	6.000	3.000	0.109	0.109	1.60
6" x 4"	7WRT4P-600400	7WRT6P-600400	5.500	6.000	4.000	0.109	0.109	1.60
8" x 2"	7WRT4P-800200	7WRT6P-800200	6.000	8.000	3.000	0.109	0.109	3.15
8" x 3"	7WRT4P-800300	7WRT6P-800300	6.000	8.000	3.000	0.109	0.109	3.15
8" x 4"	7WRT4P-800400	7WRT6P-800400	6.000	8.000	4.000	0.109	0.109	3.15
8" x 6"	7WRT4P-800600	7WRT6P-800600	6.000	8.000	6.000	0.109	0.109	2.95

Type A (VB) Stub Ends

Size (Tube OD)	Part Number		Dimensions				Weight (lbs.)
	304	316L	A	B	C	D	
1/2"	--	14VB6-050	1.375	1.625	0.065	0.500	0.030
3/4"	--	14VB6-075	1.438	1.688	0.065	0.750	0.030
1 "	--	14VB6-100	1.625	2.000	0.065	1.000	0.090
1-1/2"	--	14VB6-150	1.750	2.875	0.065	1.500	0.110
2 "	--	14VB6-200	1.500	3.625	0.065	2.000	0.120
2-1/2"	--	14VB6-250	2.000	4.125	0.065	2.500	0.290
3 "	--	14VB6-300	2.250	5.000	0.065	3.000	0.330
4 "	--	14VB6-400	2.625	6.187	0.084	4.000	0.460
6 "	--	14VB6-600	3.000	8.500	0.109	6.000	0.560
8 "	--	14VB6-800	3.000	10.625	0.109	8.000	0.920
10 "	--	14VB6-1000	3.500	12.450	0.109	10.000	4.35
12 "	--	14VB6-1200	3.500	14.625	0.109	12.000	5.68




Notes:

- Compatible with 1/2" Thick Tube (38SL) Flanges


Polished End Caps



Size (Tube OD)	Part Number		Dimensions	Weight (lbs.)
	304	316L	A	
1/2"	--	16W6P-050	0.250	0.01
3/4"	--	16W6P-075	0.328	0.015
1 "	16W4P-100	16W6P-100	0.375	0.09
1-1/2"	16W4P-150	16W6P-150	0.562	0.11
2 "	16W4P-200	16W6P-200	0.750	0.12
2-1/2"	16W4P-250	16W6P-250	1.000	0.29
3 "	16W4P-300	16W6P-300	1.250	0.33
4 "	16W4P-400	16W6P-400	1.500	0.46
6 "	16W4P-600	16W6P-600	1.875	0.56
8 "	16W4P-800	16W6P-800	2.688	0.92




Male NPT x Tube OD Weld Adapters



Size (OD x NPT)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	Wall	
1/2"	19WB4-050	19WB6-050	1.625	0.065	0.16
3/4"	19WB4-075	19WB6-075	1.625	0.065	0.24
1 "	19WB4-100	19WB6-100	1.750	0.065	0.14
1-1/2"	19WB4-150	19WB6-150	1.750	0.065	0.28
2 "	19WB4-200	19WB6-200	1.812	0.065	0.42
2-1/2"	19WB4-250	19WB6-250	2.312	0.065	0.49
3 "	19WB4-300	19WB6-300	2.500	0.065	0.91
4 "	19WB4-400	19WB6-400	2.562	0.083	1.33

BUTT WELD FITTINGS

Tube OD Weld x Schedule 10s Weld Adapters



Size (OD x NPT)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	Tube Wall	Pipe Wall	
1/2"	19WX4-050	19WX6-050	1.000	0.065	0.109	0.12
3/4"	19WX4-075	19WX6-075	1.000	0.065	0.109	0.18
1 "	19WX4-100	19WX6-100	1.000	0.065	0.109	0.15
1-1/2"	19WX4-150	19WX6-150	0.750	0.065	0.109	0.19
2 "	19WX4-200	19WX6-200	0.750	0.065	0.109	0.23
2-1/2"	19WX4-250	19WX6-250	1.000	0.065	0.120	0.45
3 "	19WX4-300	19WX6-300	1.000	0.065	0.120	0.74
4 "	19WX4-400	19WX6-400	1.000	0.083	0.120	1.15

Polished Laterals



Size (Tube OD)	Part Number		Dimensions				Weight (lbs.)
	304	316L	A	B	C	Wall	
1 "	28WA4P-100	28WA6P-100	6.000	1.000	5.000	0.065	0.75
1-1/2 "	28WA4P-150	28WA6P-150	7.375	1.188	6.188	0.065	1.12
2 "	28WA4P-200	28WA6P-200	8.750	1.625	7.125	0.065	1.50
2-1/2 "	28WA4P-250	28WA6P-250	10.000	1.500	8.500	0.065	2.35
3 "	28WA4P-300	28WA6P-300	10.750	1.875	8.875	0.065	2.92
4 "	28WA4P-400	28WA6P-400	12.812	2.015	10.750	0.083	5.30
6 "	28WA4P-600	28WA6P-600	18.000	3.500	14.500	0.109	10.00




Polished True Wyes



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	Wall	
1 "	28W4P-100	28W6P-100	2.000	2.438	0.065	0.75
1-1/2 "	28W4P-150	28W6P-150	2.000	2.438	0.065	1.12
2 "	28W4P-200	28W6P-200	2.625	3.250	0.065	1.50
2-1/2 "	28W4P-250	28W6P-250	3.370	4.125	0.065	2.35
3 "	28W4P-300	28W6P-300	4.000	4.875	0.065	2.92
4 "	28W4P-400	28W6P-400	5.375	5.375	0.083	5.30
6 "	28W4P-600	28W6P-600	8.000	8.000	0.109	10.00



Polished Crosses

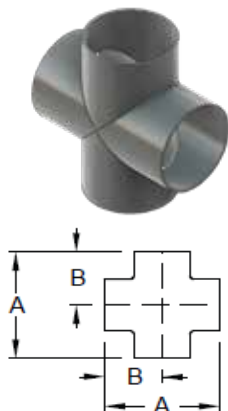

Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	Wall	
1 "	9W4P-100	9W6P-100	2.250	1.125	0.065	0.32
1-1/2 "	9W4P-150	9W6P-150	3.312	1.656	0.065	0.41
2 "	9W4P-200	9W6P-200	4.125	2.062	0.065	0.57
2-1/2 "	9W4P-250	9W6P-250	4.687	2.343	0.065	0.88
3 "	9W4P-300	9W6P-300	5.187	2.593	0.065	1.19
4 "	9W4P-400	9W6P-400	6.875	3.437	0.083	2.40
6 "	9W4P-600	9W6P-600	11.3125	11.3125	0.109	11.59

BUTT WELD FITTINGS

Polished 180° Return Bends



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	2WUL4P-100	2WUL6P-100	3.000	2.000	0.39
1-1/2 "	2WUL4P-150	2WUL6P-150	4.500	3.000	0.50
2 "	2WUL4P-200	2WUL6P-200	6.000	4.000	1.02
2-1/2 "	2WUL4P-250	2WUL6P-250	7.500	5.000	1.66
3 "	2WUL4P-300	2WUL6P-300	9.000	6.000	2.32
4 "	2WUL4P-400	2WUL6P-400	12.000	8.000	5.17
6 "	2WUL4P-600	2WUL6P-600	18.000	12.000	17.95

Polished 12" 90° Sweep Elbows



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	R	
1 "	2SXL124-100	2SXL126-100	12.000	12.000	1.55
1-1/2 "	2SXL124-150	2SXL126-150	12.000	12.000	2.62
2 "	2SXL124-200	2SXL126-200	12.000	12.000	2.99
2-1/2 "	2SXL124-250	2SXL126-250	12.000	12.000	4.06
3 "	2SXL124-300	2SXL126-300	12.000	12.000	5.23
4 "	2SXL124-400	2SXL126-400	12.000	12.000	10.10



Notes:

- All Sweeps will be provided with standard tangent lengths equal to two times the diameter.
- 45° sweeps and other end configurations available.

Polished 18" 90° Sweep Elbows



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	R	
1-1/2 "	2SXL184-150	2SXL186-150	18.000	18.000	2.84
2 "	2SXL184-200	2SXL186-200	18.000	18.000	4.05
2-1/2 "	2SXL184-250	2SXL186-250	18.000	18.000	4.94
3 "	2SXL184-300	2SXL186-300	18.000	18.000	6.83
4 "	2SXL184-400	2SXL186-400	18.000	18.000	12.80



Notes:

- All Sweeps will be provided with standard tangent lengths equal to two times the diameter.
- 45° sweeps and other end configurations available.

Polished 24" 90° Sweep Elbows



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	R	
1-1/2"	2SXL244-150	2SXL246-150	24.000	24.000	3.62
2"	2SXL244-200	2SXL246-200	24.000	24.000	5.11
2-1/2"	2SXL244-250	2SXL246-250	24.000	24.000	6.71
3"	2SXL244-300	2SXL246-300	24.000	24.000	8.43
4"	2SXL244-400	2SXL246-400	24.000	24.000	15.53

Notes:

- All Sweeps will be provided with standard tangent lengths equal to two times the diameter.
- 45° sweeps and other end configurations available.

Polished 36" 90° Sweep Elbows



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	R	
2"	2SXL364-200	2SXL366-200	36.000	36.000	7.22
2-1/2"	2SXL364-250	2SXL366-250	36.000	36.000	9.37
3"	2SXL364-300	2SXL366-300	36.000	36.000	11.63
4"	2SXL364-400	2SXL366-400	36.000	36.000	20.55


Notes:

- All Sweeps will be provided with standard tangent lengths equal to two times the diameter.
- 45° sweeps and other end configurations available.

Clamp Fittings




Long Weld Clamp Ferrules



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1/2"	14AM74-050	14AM76-050	1.125	0.370	0.500	0.05
3/4"	14AM74-075	14AM76-075	1.125	0.620	0.750	0.08
1"	14AM74-100	14AM76-100	1.125	0.870	1.000	0.10
1-1/2"	14AM74-150	14AM76-150	1.125	1.370	1.500	0.14
2"	14AM74-200	14AM76-200	1.125	1.870	2.000	0.20
2-1/2"	14AM74-250	14AM76-250	1.125	2.370	2.500	0.25
3"	14AM74-300	14AM76-300	1.125	2.870	3.000	0.30
4"	14AM74-400	14AM76-400	1.125	3.834	4.000	0.58
5"	14AM74-500	14AM76-500	1.125	4.782	5.000	1.01
6"	14AM74-600	14AM76-600	1.500	5.782	6.000	1.08
8"	14AM74-800	14AM76-800	1.500	7.760	8.000	1.76
10"	14AM74-1000	14AM76-1000	1.500	9.782	10.000	2.60
12"	14AM74-1200	14AM76-1200	1.500	11.760	12.000	3.20

Short Weld Clamp Ferrules




Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1/2"	14WMP4-050	14WMP6-050	0.500	0.370	0.500	0.10
3/4"	14WMP4-075	14WMP6-075	0.500	0.620	0.750	0.10
1"	14WMP4-100	14WMP6-100	0.500	0.870	1.000	0.20
1-1/2"	14WMP4-150	14WMP6-150	0.500	1.370	1.500	0.20
2"	14WMP4-200	14WMP6-200	0.500	1.870	2.000	0.20
2-1/2"	14WMP4-250	14WMP6-250	0.500	2.370	2.500	0.25
3"	14WMP4-300	14WMP6-300	0.500	2.870	3.000	0.30
4"	14WMP4-400	14WMP6-400	0.625	3.834	4.000	0.60
5"	14WMP4-500	14WMP6-500	0.750	4.782	5.000	0.98
6"	14WMP4-600	14WMP6-600	0.875	5.782	6.000	1.20
8"	14WMP4-800	14WMP6-800	0.875	7.760	8.000	1.75
10"	14WMP4-1000	14WMP6-1000	0.875	9.782	10.000	1.60
12"	14WMP4-1200	14WMP6-1200	0.875	11.760	12.000	1.95

Short Reducing Ferrules




Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
2" x 1"	31WMP4-200100	31WMP6-200100	0.500	0.870	1.000	0.29
2" x 1-1/2"	31WMP4-200150	31WMP6-200150	0.500	1.375	1.500	0.29
2-1/2" x 1-1/2"	31WMP4-250150	31WMP6-250150	0.500	1.375	1.500	0.30
2-1/2" x 2"	31WMP4-250200	31WMP6-250200	0.500	1.870	2.000	0.30
3" x 2"	31WMP4-300200	31WMP6-300200	0.500	1.870	2.000	0.34
3" x 2-1/2"	31WMP4-300250	31WMP6-300250	0.500	2.370	2.500	0.34
4" x 3"	31WMP4-400300	31WMP6-400300	0.625	2.870	3.000	0.37

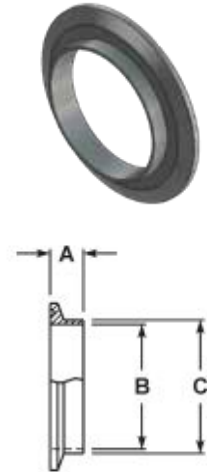


Light Duty Tank Ferrules



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1/2"	--	14WLMP6-050	3.000	0.370	0.500	0.12
3/4"	--	14WLMP6-075	3.000	0.620	0.750	0.15
1 "	14WLMP4-100	14WLMP6-100	3.000	0.870	1.000	0.22
1-1/2"	14WLMP4-150	14WLMP6-150	3.000	1.370	1.500	0.26
2 "	14WLMP4-200	14WLMP6-200	3.000	1.870	2.000	0.32
2-1/2"	14WLMP4-250	14WLMP6-250	3.000	2.370	2.500	0.35
3 "	14WLMP4-300	14WLMP6-300	4.000	2.870	3.000	0.45
4 "	14WLMP4-400	14WLMP6-400	4.000	3.834	4.000	0.72
6 "	14WLMP4-600	14WLMP6-600	6.000	5.782	6.000	1.05
8 "	14WLMP4-800	14WLMP6-800	6.000	7.760	8.000	1.76
10 "	14WLMP4-1000	14WLMP6-1000	6.000	9.760	10.000	8.41
12 "	14WLMP4-1200	14WLMP6-1200	6.000	11.760	12.000	9.85




Tygon Hose Adapters



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1 "	14MPHT4-100	14MPHT6-100	4.500	0.870	1.000	0.36
1-1/2"	14MPHT4-150	14MPHT6-150	4.500	1.370	1.500	0.44
2 "	14MPHT4-200	14MPHT6-200	4.500	1.870	2.000	0.67
2-1/2"	14MPHT4-250	14MPHT6-250	4.500	2.370	2.500	0.76
3 "	14MPHT4-300	14MPHT6-300	4.500	2.870	3.000	0.92
4 "	14MPHT4-400	14MPHT6-400	4.625	3.834	4.000	1.62

Automated Weld Ferrules (for Orbital Welding)




Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1/2"	--	STL14AM76PL-050	1.750	0.370	0.500	0.08
3/4"	--	STL14AM76PL-075	1.750	0.620	0.750	0.10
1 "	--	STL14AM76PL-100	1.750	0.870	1.000	0.24
1-1/2"	--	STL14AM76PL-150	1.750	1.370	1.500	0.24
2 "	--	STL14AM76PL-200	2.250	1.870	2.000	0.40
2-1/2"	--	STL14AM76PL-250	2.250	2.370	2.500	0.53
3 "	--	STL14AM76PL-300	2.250	2.870	3.000	0.64
4 "	--	STL14AM76PL-400	2.250	3.834	4.000	1.09
6 "	--	STL14AM76PL-600	3.000	5.782	6.000	2.12
8 "	--	STL14AM76PL-800	3.000	7.760	8.000	3.15

Heavy Duty Tank Weld Ferrules (ASME Certified)




Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1/2 "	--	14MPW6-050	1.625	0.321	0.502	0.150
3/4 "	--	14MPW6-075	1.626	0.574	0.750	0.15
1 "	--	14MPW6-100	1.625	0.870	1.160	0.320
1-1/2 "	--	14MPW6-150	1.625	1.370	1.676	0.40
2 "	--	14MPW6-200	1.750	1.870	2.192	0.570
2-1/2 "	--	14MPW6-250	1.750	2.370	2.708	0.72
3 "	--	14MPW6-300	1.813	2.870	3.224	0.970
4 "	--	14MPW6-400	2.125	3.834	4.256	1.79
6 "	--	14MPW6-600	2.500	5.758	6.192	2.120
8 "	--	14MPW6-800	2.500	7.758	8.192	3.63




Roll-On Expanding Ferrules



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	14RMP4-100	--	0.750	1.005	0.150
1-1/2 "	14RMP4-150	--	1.125	1.505	0.16
2 "	14RMP4-200	--	1.312	2.005	0.270
2-1/2 "	14RMP4-250	--	1.375	2.505	0.36
3 "	14RMP4-300	--	1.437	3.005	0.505
4 "	14RMP4-400	--	1.500	4.005	1.25
6 "	14RMP4-600	--	2.000	6.005	1.810



Thermometer Caps




Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)	Standard Tap Size
	304	316L	A	B		
1 "	--	23BMP6-100	0.625	1.984	0.28	0.50
1-1/2"	--	23BMP6-150	0.625	1.984	0.28	0.75
2 "	--	23BMP6-200	0.625	2.516	0.23	0.75
2-1/2"	--	23BMP6-250	0.625	3.047	0.27	0.75
3 "	--	23BMP6-300	0.625	3.579	0.31	0.75
4 "	--	23BMP6-400	0.625	4.682	0.43	0.75

Notes:


- All tap sizes available

Rubber Hose Adapters

Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	Hose Size	A	B	
1/2"	--	14MPHR6-050	0.500	1.500	0.500	0.06
1/2" x 1/8"	--	14MPHR6-050125	0.125	1.250	0.125	0.06
1/2" x 1/4"	--	14MPHR6-050025	0.250	1.500	0.250	0.05
1/2" x 3/8"	--	14MPHR6-050375	0.375	1.500	0.375	0.06
3/4"	--	14MPHR6-075	0.750	1.500	0.750	0.07
3/4" x 1/8"	--	14MPHR6-075125	0.125	1.500	0.125	0.06
3/4" x 1/4"	--	14MPHR6-075025	0.250	1.500	0.250	0.06
3/4" x 3/8"	--	14MPHR6-075375	0.375	1.500	0.375	0.07
1"	14MPHR4-100	14MPHR6-100	1.000	1.688	1.000	0.26
1" X 1/8"	--	14MPHR6-100125	0.125	1.500	0.125	0.19
1" X 1/4"	--	14MPHR6-100250	0.250	1.500	0.250	0.19
1" X 3/8"	--	14MPHR6-100375	0.375	1.500	0.375	0.19
1" X 1/2"	--	14MPHR6-100050	0.500	1.500	0.500	0.19
1" X 3/4"	--	14MPHR6-100075	0.075	1.688	0.075	0.19
1-1/2"	14MPHR4-150	14MPHR6-150	1.500	1.687	1.500	0.24
1-1/2" X 1/8"	--	14MPHR6-150125	0.125	1.500	0.125	0.19
1-1/2" X 1/4"	--	14MPHR6-150250	0.250	1.500	0.250	0.19
1-1/2" X 3/8"	--	14MPHR6-150375	0.375	1.500	0.375	0.19
1-1/2" X 1/2"	--	14MPHR6-150050	0.500	1.500	0.500	0.19
1-1/2" X 3/4"	--	14MPHR6-150075	0.750	1.500	0.750	0.19
1-1/2" X 1"	--	14MPHR6-150100	1.000	1.687	1.000	0.26
2"	14MPHR4-200	14MPHR6-200	2.000	2.312	2.000	0.42
2" X 1/2"	--	14MPHR6-200050	0.500	2.312	0.500	0.39
2" X 3/4"	--	14MPHR6-200075	0.075	2.312	0.750	0.39
2" X 1"	--	14MPHR6-200100	1.000	2.312	1.000	0.44
2" X 1-1/2"	--	14MPHR6-200150	1.500	2.312	1.500	0.44
2-1/2"	14MPHR4-250	14MPHR6-250	2.500	2.344	2.500	0.49
3"	14MPHR4-300	14MPHR6-300	3.000	3.094	3.000	0.70
4"	14MPHR4-400	14MPHR6-400	4.000	3.406	4.000	1.15
6"	14MPHR4-600	14MPHR6-600	6.000	3.406	6.000	2.36
8"	14MPHR4-800	14MPHR6-800	8.000	3.406	8.000	3.14



Single Pin Heavy Duty Clamps with Wing Nut




Size (Tube OD)	Part Number	Service Pressure Rating at 70°F	Service Pressure Rating at 250°F	Dimensions A	Weight (lbs.)
1/2" - 3/4"	13MHM-050-075	1,500	1,200	1.062	0.35
1" - 1-1/2"	13MHM-100-150	500	300	2.122	0.51
2 "	13MHM-200	450	250	2.654	0.60
2-1/2"	13MHM-250	400	200	3.185	0.66
3 "	13MHM-300	350	175	3.717	0.74
4 "	13MHM-400	300	150	4.820	0.94
5 "	13MHM-500	225	100	5.820	1.52
6 "	13MHM-600	150	75	6.695	1.94
8 "	13MHM-800	100	50	8.695	2.33
10 "	13MHM-1000	75	40	10.695	5.29
12 "	13MHM-1200	50	25	12.695	6.61

Notes:

- All clamps are T304 Stainless Steel.
- Pressure ratings assume wing nut tightened to 25 in/lbs of torque.

Bolted Clamps



Size (Tube OD)	Part Number	Service Pressure Rating at 70°F	Service Pressure Rating at 250°F	Dimensions A	Weight (lbs.)
1/2" - 3/4"	13MHP-050-075	1,500	1,200	1.062	0.32
1" - 1-1/2"	13MHP-100-150	1,500	1,200	2.046	0.95
2 "	13MHP-200	1,000	800	2.578	1.19
2-1/2"	13MHP-250	1,000	800	3.110	1.32
3 "	13MHP-300	1,000	800	3.640	1.54
4 "	13MHP-400	800	600	4.744	1.50
6 "	13MHP-600	300	200	6.632	2.58
8 "	13MHP-800	250	150	8.638	3.63


Notes:

- Clamps are T304 Stainless Steel. Nuts are brass.
- Pressure ratings assume wing nut tightened to 20 ft/lbs of torque.

Solid Clamp End Caps




Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1/2" - 3/4"	--	16AMP6-050-075	0.187	0.992	0.20
1" - 1 1/2"	--	16AMP6-100-150	0.250	1.984	0.15
2"	16AMP4-200	16AMP6-200	0.250	2.516	0.30
2-1/2"	16AMP4-250	16AMP6-250	0.250	3.047	0.44
3"	16AMP4-300	16AMP6-300	0.250	3.579	0.90
4"	16AMP4-400	16AMP6-400	0.312	4.682	1.25
5"	16AMP4-500	16AMP6-500	0.312	5.687	2.34
6"	16AMP4-600	16AMP6-600	0.437	6.570	3.70
8"	16AMP4-800	16AMP6-800	0.437	8.570	6.71
10"	16AMP4-1000	16AMP6-1000	0.437	10.570	10.44
12"	16AMP4-1200	16AMP6-1200	0.437	12.570	14.50

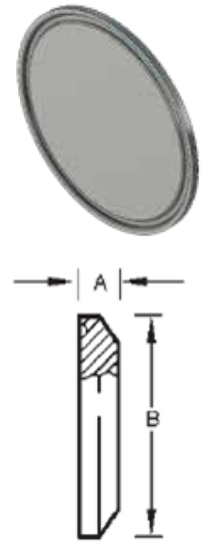


90° Clamp Elbows



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	R	
1/2"	--	2CMP6-050	1.625	1.125	0.25
3/4"	--	2CMP6-075	1.625	1.125	0.25
1"	2CMP4-100	2CMP6-100	2.000	1.500	0.50
1-1/2"	2CMP4-150	2CMP6-150	2.750	2.250	0.75
2"	2CMP4-200	2CMP6-200	3.500	3.000	0.90
2-1/2"	2CMP4-250	2CMP6-250	4.250	3.750	1.20
3"	2CMP4-300	2CMP6-300	5.000	4.500	1.90
4"	2CMP4-400	2CMP6-400	6.625	6.000	4.10
5"	2CMP4-500	2CMP6-500	8.250	7.500	9.84
6"	2CMP4-600	2CMP6-600	9.875	9.000	10.00
8"	2CMP4-800	2CMP6-800	12.875	12.000	15.61
10"	2CMP4-1000	2CMP4-1000	15.875	15.000	19.37
12"	2CMP4-1200	2CMP4-1200	15.875	18.000	21.39

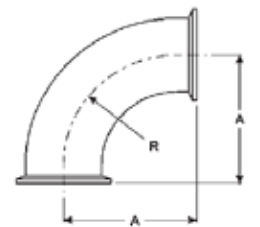

90° Clamp x Weld Elbows




Size (Tube OD)	Part Number		Dimensions				Weight (lbs.)
	304	316L	A	B	R	Wall	
1/2"	--	L2CM6-050	3.500	3.000	1.125	0.065	0.15
3/4"	--	L2CM6-075	3.500	3.000	1.125	0.065	0.21
1"	L2CM4-100	L2CM6-100	2.562	2.062	1.500	0.065	0.35
1-1/2"	L2CM4-150	L2CM6-150	3.438	2.937	2.250	0.065	0.50
2"	L2CM4-200	L2CM6-200	4.562	4.062	3.000	0.065	0.85
2-1/2"	L2CM4-250	L2CM6-250	5.688	5.187	3.750	0.065	1.32
3"	L2CM4-300	L2CM6-300	6.812	6.312	4.500	0.065	1.99
4"	L2CM4-400	L2CM6-400	8.937	8.312	6.000	0.083	4.05
6"	L2CM4-600	L2CM6-600	12.375	11.500	9.000	0.109	12.40

Notes:

- Other configurations available upon request. Call Sanitube for information.

Non-Tapered Reducing Clamp 90° Elbows




Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
2" x 1-1/2"	2CMP31MP4-200150	2CMP31MP6-200150	2.750	2.750	0.75
2-1/2" x 2"	2CMP31MP4-250200	2CMP31MP6-250200	3.500	3.500	1.16
3" x 2"	2CMP31MP4-300200	2CMP31MP6-300200	3.500	3.500	1.58
3" x 2-1/2"	2CMP31MP4-300250	2CMP31MP6-300250	4.250	4.250	1.58
4" x 2-1/2"	2CMP31MP4-400250	2CMP31MP6-400250	4.380	4.250	3.27
4" x 3"	2CMP31MP4-400300	2CMP31MP6-400300	5.130	5.000	3.27

90° Elbow Clamp x Bevel Seat Nut




Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	2FMP144-100	--	2.218	2.000	0.78
1-1/2"	2FMP144-150	--	2.968	2.750	0.93
2 "	2FMP144-200	--	3.750	3.500	2.12
2-1/2"	2FMP144-250	--	4.625	4.250	2.74
3 "	2FMP144-300	--	5.406	5.000	4.37
4 "	2FMP144-400	--	7.031	6.625	6.27




Clamp Tee



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1/2"	--	7MP6-050	4.750	2.375	0.45
3/4"	--	7MP6-075	5.000	2.750	0.45
1 "	7MP4-100	7MP6-100	4.750	2.375	0.66
1-1/2"	7MP4-150	7MP6-150	5.500	2.750	0.72
2 "	7MP4-200	7MP6-200	7.000	3.500	1.23
2-1/2"	7MP4-250	7MP6-250	7.000	3.500	1.44
3 "	7MP4-300	7MP6-300	7.500	3.750	1.93
4 "	7MP4-400	7MP6-400	9.000	4.500	3.82
5 "	7MP4-500	7MP6-500	11.250	5.625	10.19
6 "	7MP4-600	7MP6-600	13.000	6.500	14.00
8 "	7MP4-800	7MP6-800	15.750	7.875	17.25
10 "	7MP4-1000	7MP6-1000	18.750	9.375	22.63
12 "	7MP4-1200	7MP6-1200	21.750	10.735	26.19




Clamp Short Outlet Tees

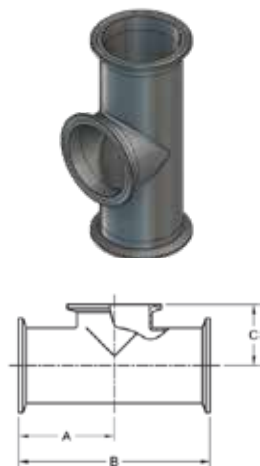

Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1/2"	--	7MPS6-050	2.375	4.750	0.875	0.45
3/4"	--	7MPS6-075	2.750	5.500	1.000	0.45
1 "	7MPS4-100	7MPS6-100	2.375	4.750	1.125	0.66
1-1/2"	7MPS4-150	7MPS6-150	2.750	5.500	1.375	0.72
2 "	7MPS4-200	7MPS6-200	3.500	7.000	1.625	1.23
2-1/2"	7MPS4-250	7MPS6-250	3.500	7.000	1.875	1.44
3 "	7MPS4-300	7MPS6-300	3.750	7.500	2.125	1.93
4 "	7MPS4-400	7MPS6-400	4.500	9.000	2.750	3.82
6 "	7MPS4-600	7MPS6-600	6.500	13.000	4.000	15.00
8 "	7MPS4-800	7MPS6-800	7.875	15.750	5.000	17.25
10 "	7MPS4-1000	7MPS6-1000	18.750	9.735	6.000	22.13
12 "	7MPS4-1200	7MPS6-1200	21.750	10.735	7.000	25.44

Weld Run x Clamp Branch Tees

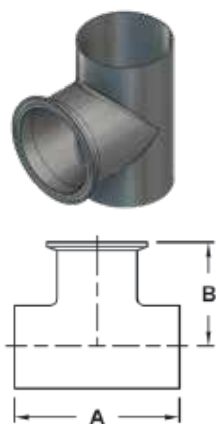

Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	Wall	
1 "	7WWM4-100	7WWM6-100	2.250	1.625	0.065	0.66
1-1/2"	7WWM4-150	7WWM6-150	3.312	2.156	0.065	0.72
2 "	7WWM4-200	7WWM6-200	4.124	2.562	0.065	1.23
2-1/2"	7WWM4-250	7WWM6-250	4.688	2.844	0.065	1.44
3 "	7WWM4-300	7WWM6-300	5.188	3.094	0.065	1.93
4 "	7WWM4-400	7WWM6-400	6.876	4.063	0.083	3.82


Notes:

- Other configurations available upon request. Call Sanitube for information.

Clamp Run x Weld Branch Tees



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	Wall	
1 "	7MMW4-100	7MMW6-100	3.250	1.125	0.065	0.66
1-1/2 "	7MMW4-150	7MMW6-150	4.312	1.656	0.065	0.72
2 "	7MMW4-200	7MMW6-200	5.124	2.062	0.065	1.23
2-1/2 "	7MMW4-250	7MMW6-250	5.688	2.062	0.065	1.44
3 "	7MMW4-300	7MMW6-300	6.188	2.594	0.065	1.93
4 "	7MMW4-400	7MMW6-400	8.124	3.438	0.083	3.82




Notes:

- Other configurations available upon request. Call Sanitube for information.

Weld x Clamp Run x Clamp Branch Tees



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	Wall	
1 "	7WMM4-100	7WMM6-100	2.750	1.625	0.065	0.66
1-1/2 "	7WMM4-150	7WMM6-150	3.812	2.156	0.065	0.72
2 "	7WMM4-200	7WMM6-200	4.624	2.562	0.065	1.23
2-1/2 "	7WMM4-250	7WMM6-250	5.188	2.844	0.065	1.44
3 "	7WMM4-300	7WMM6-300	5.688	3.094	0.065	1.93
4 "	7WMM4-400	7WMM6-400	7.500	4.063	0.083	3.82



Notes:

- Other configurations available upon request. Call Sanitube for information.

Clamp 45° Elbows



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	R	
1/2 "	--	2KMP6-050	0.966	1.125	0.25
3/4 "	--	2KMP6-075	0.966	1.125	0.25
1 "	2KMP4-100	2KMP6-100	1.125	1.500	0.50
1-1/2 "	2KMP4-150	2KMP6-150	1.437	2.250	0.50
2 "	2KMP4-200	2KMP6-200	1.750	3.000	0.70
2-1/2 "	2KMP4-250	2KMP6-250	2.062	3.750	0.80
3 "	2KMP4-300	2KMP6-300	2.375	4.500	1.50
4 "	2KMP4-400	2KMP6-400	3.125	6.000	2.50
5 "	2KMP4-500	2KMP6-500	3.875	7.500	4.92
6 "	2KMP4-600	2KMP6-600	4.625	9.000	7.00
8 "	2KMP4-800	2KMP6-800	5.875	12.000	10.42
10 "	2KMP4-1000	2KMP6-1000	7.125	15.000	12.95
12 "	2KMP4-1200	2KMP6-1200	8.375	18.000	13.60

Clamp x Weld 45° Elbows




Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	Wall	
1/2 "	--	L2KM6-050	2.250	2.750	0.065	0.15
3/4 "	--	L2KM6-075	2.250	2.750	0.065	0.21
1 "	L2KM4-100	L2KM6-100	1.180	1.688	0.065	0.35
1-1/2 "	L2KM4-150	L2KM6-150	1.625	2.125	0.065	0.50
2 "	L2KM4-200	L2KM6-200	2.312	2.812	0.065	0.85
2-1/2 "	L2KM4-250	L2KM6-250	3.000	3.500	0.065	1.32
3 "	L2KM4-300	L2KM6-300	3.688	4.188	0.065	1.99
4 "	L2KM4-400	L2KM6-400	4.812	5.437	0.083	4.05
6 "	L2KM4-600	L2KM6-600	6.750	7.625	0.109	10.080


Clamp Concentric Reducers



Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
3/4" x 1/2"	--	3114MP6-075050	2.000	0.25
1" x 1/2"	--	3114MP6-100050	2.000	0.30
1" x 3/4"	--	3114MP6-100075	2.000	0.45
1-1/2" x 1/2"	--	3114MP6-150050	5.000	0.60
1-1/2" x 3/4"	--	3114MP6-150075	4.000	0.58
1-1/2" x 1"	3114MP4-150100	3114MP6-150100	3.000	0.50
2" x 1/2"	3114MP4-200050	3114MP6-200050	7.000	1.20
2" x 3/4"	3114MP4-200075	3114MP6-200075	6.000	1.15
2" x 1"	3114MP4-200100	3114MP6-200100	5.000	1.00
2" x 1-1/2"	3114MP4-200150	3114MP6-200150	3.000	0.50
2-1/2" x 1-1/2"	3114MP4-250150	3114MP6-250150	5.000	1.00
2-1/2" x 2"	3114MP4-250200	3114MP6-250200	3.000	0.75
3" x 1"	3114MP4-300100	3114MP6-300100	9.000	2.10
3" x 1-1/2"	3114MP4-300150	3114MP6-300150	7.000	1.50
3" x 2"	3114MP4-300200	3114MP6-300200	5.000	1.10
3" x 2-1/2"	3114MP4-300250	3114MP6-300250	3.000	1.00
4" x 1"	3114MP4-400100	3114MP6-400100	11.125	2.50
4" x 1-1/2"	3114MP4-400150	3114MP6-400150	11.125	2.25
4" x 2"	3114MP4-400200	3114MP6-400200	9.125	2.00
4" x 2-1/2"	3114MP4-400250	3114MP6-400250	7.125	2.00
4" x 3"	3114MP4-400300	3114MP6-400300	5.125	2.00
6" x 2"	3114MP4-600200	3114MP6-600200	6.875	5.35
6" x 3"	3114MP4-600300	3114MP6-600300	6.875	5.00
6" x 4"	3114MP4-600400	3114MP6-600400	7.000	5.00
8" x 3"	3114MP4-800300	3114MP6-800300	7.500	6.63
8" x 4"	3114MP4-800400	3114MP6-800400	7.500	6.63
8" x 6"	3114MP4-800600	3114MP6-800600	7.750	6.63
10" x 8"	3114MP4-1000800	3114MP6-1000800	9.750	13.50
12" x 10"	3114MP4-12001000	3114MP6-1200800	9.750	17.60



Clamp Eccentric Reducers




Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
3/4" x 1/2"	--	3214MP6-075050	2.000	0.25
1" x 1/2"	--	3214MP6-100050	3.000	0.30
1" x 3/4"	--	3214MP6-100075	2.000	0.45
1-1/2" x 1/2"	--	3214MP6-150050	5.000	0.60
1-1/2" x 3/4"	--	3214MP6-150075	4.000	0.58
1-1/2" x 1"	3214MP4-150100	3214MP6-150100	3.000	0.50
2" x 1/2"	3214MP4-200050	3214MP6-200050	7.000	1.20
2" x 3/4"	3214MP4-200075	3214MP6-200075	6.000	1.15
2" x 1"	3214MP4-200100	3214MP6-200100	5.000	1.00
2" x 1-1/2"	3214MP4-200150	3214MP6-200150	3.000	0.50
2-1/2" x 1-1/2"	3214MP4-250150	3214MP6-250150	5.000	1.00
2-1/2" x 2"	3214MP4-250200	3214MP6-250200	3.000	0.75
3" x 1"	3214MP4-300100	3214MP6-300100	9.000	2.10
3" x 1-1/2"	3214MP4-300150	3214MP6-300150	7.000	1.50
3" x 2"	3214MP4-300200	3214MP6-300200	5.000	1.10
3" x 2-1/2"	3214MP4-300250	3214MP6-300250	3.000	1.00
4" x 1"	3214MP4-400100	3214MP6-400100	13.125	2.50
4" x 1-1/2"	3214MP4-400150	3214MP6-400150	11.125	2.25
4" x 2"	3214MP4-400200	3214MP6-400200	9.125	2.00
4" x 2-1/2"	3214MP4-400250	3214MP6-400250	7.125	2.00
4" x 3"	3214MP4-400300	3214MP6-400300	5.125	2.00
6" x 2"	3214MP4-600200	3214MP6-600200	6.875	5.35
6" x 3"	3214MP4-600300	3214MP6-600300	6.875	5.00
6" x 4"	3214MP4-600400	3214MP6-600400	7.000	5.00
8" x 3"	3214MP4-800300	3214MP6-800300	7.500	6.63
8" x 4"	3214MP4-800400	3214MP6-800400	7.500	6.63
8" x 6"	3214MP4-800600	3214MP6-800600	7.750	6.63
10" x 8"	3214MP4-1000800	3214MP6-1000800	8.750	10.50
12" x 10"	3214MP4-12001000	3214MP6-12001000	9.750	13.60


Clamp Reducing Tees



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
3/4" x 1/2"	--	7RMP6-075050	5.000	2.500	2.500	0.22
1" x 1/2"	--	7RMP6-100050	5.250	2.626	2.625	0.25
1" x 3/4"	7RMP4-150100	7RMP6-150100	5.250	2.625	2.625	0.25
1-1/2" x 1/2"	7RMP4-150100	7RMP6-150100	5.750	2.875	2.875	0.38
1-1/2" x 3/4"	7RMP4-150100	7RMP6-150100	5.750	2.875	2.875	0.38
1-1/2" x 1"	7RMP4-150100	7RMP6-150100	4.312	2.156	1.875	0.38
2" x 1/2"	7RMP4-200100	7RMP6-200100	6.750	3.375	3.125	0.56
2" x 3/4"	7RMP4-200100	7RMP6-200100	6.750	3.375	3.125	0.56
2" x 1"	7RMP4-200100	7RMP6-200100	5.125	2.562	2.125	0.59
2" x 1-1/2"	7RMP4-200150	7RMP6-200150	5.125	2.562	2.406	0.62
2-1/2" x 1"	7RMP4-250100	7RMP6-250100	5.688	2.844	2.656	0.80
2-1/2" x 1-1/2"	7RMP4-250150	7RMP6-250150	5.688	2.844	2.656	0.80
2-1/2" x 2"	7RMP4-250200	7RMP6-250200	5.688	2.844	2.812	0.78
3" x 1"	7RMP4-300100	7RMP6-300100	7.500	3.750	4.000	1.39
3" x 1-1/2"	7RMP4-300150	7RMP6-300150	6.188	3.093	2.906	1.39
3" x 2"	7RMP4-300200	7RMP6-300200	6.188	3.093	3.063	1.42
3" x 2-1/2"	7RMP4-300250	7RMP6-300250	6.188	3.093	3.093	1.42
4" x 1"	7RMP4-400100	7RMP6-400100	8.126	4.063	4.500	2.52
4" x 1-1/2"	7RMP4-400150	7RMP6-400150	8.125	4.063	3.406	2.52
4" x 2"	7RMP4-400200	7RMP6-400200	8.125	4.063	3.563	2.63
4" x 2-1/2"	7RMP4-400250	7RMP6-400250	8.125	4.063	3.594	2.63
4" x 3"	7RMP4-400300	7RMP6-400300	8.125	4.063	3.594	2.52
6" x 2"	7RMP4-600200	7RMP6-600200	13.000	6.500	5.375	7.35
6" x 3"	7RMP4-600300	7RMP6-600300	13.000	6.500	5.375	7.45
6" x 4"	7RMP4-600400	7RMP6-600400	13.000	6.500	5.750	7.15
8" x 2"	7RMP4-800200	7RMP6-800200	15.750	7.875	7.500	9.30
8" x 3"	7RMP4-800300	7RMP6-800300	15.750	7.875	7.500	9.70
8" x 4"	7RMP4-800400	7RMP6-800400	15.750	7.875	7.500	9.45
8" x 6"	7RMP4-800600	7RMP6-800600	15.750	7.875	7.500	9.75
10" x 8"	7RMP4-1000800	7RMP6-1000800	18.750	9.375	9.375	21.14
12" x 10"	7RMP4-12001000	7RMP6-12001000	21.750	10.875	10.875	27.03




Clamp Short Outlet Reducing Tees




Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
3/4" x 1/2"	--	7RMPS6-075050	5.000	2.500	1.000	0.22
1" x 1/2"	--	7RMPS6-100050	5.250	2.626	1.125	0.25
1" x 3/4"	7RMPS4-150100	7RMPS6-150100	5.250	2.625	1.125	0.25
1-1/2" x 1/2"	7RMPS4-150100	7RMPS6-150100	5.750	2.875	1.375	0.38
1-1/2" x 3/4"	7RMPS4-150100	7RMPS6-150100	5.750	2.875	1.375	0.38
1-1/2" x 1"	7RMPS4-150100	7RMPS6-150100	4.312	2.156	1.375	0.38
2" x 1/2"	7RMPS4-200100	7RMPS6-200100	6.750	3.375	1.625	0.56
2" x 3/4"	7RMPS4-200100	7RMPS6-200100	6.750	3.375	1.625	0.56
2" x 1"	7RMPS4-200100	7RMPS6-200100	5.125	2.562	1.625	0.59
2" x 1-1/2"	7RMPS4-200150	7RMPS6-200150	5.125	2.562	1.625	0.62
2-1/2" x 1"	7RMPS4-250100	7RMPS6-250100	5.688	2.844	1.875	0.80
2-1/2" x 1-1/2"	7RMPS4-250150	7RMPS6-250150	5.688	2.844	1.875	0.80
2-1/2" x 2"	7RMPS4-250200	7RMPS6-250200	5.688	2.844	1.875	0.78
3" x 1"	7RMPS4-300100	7RMPS6-300100	7.500	3.750	2.125	1.39
3" x 1-1/2"	7RMPS4-300150	7RMPS6-300150	6.188	3.093	2.125	1.39
3" x 2"	7RMPS4-300200	7RMPS6-300200	6.188	3.093	2.125	1.42
3" x 2-1/2"	7RMPS4-300250	7RMPS6-300250	6.188	3.093	2.125	1.42
4" x 1"	7RMPS4-400100	7RMPS6-400100	8.126	4.063	2.625	2.52
4" x 1-1/2"	7RMPS4-400150	7RMPS6-400150	8.125	4.063	2.625	2.52
4" x 2"	7RMPS4-400200	7RMPS6-400200	8.125	4.063	2.625	2.63
4" x 2-1/2"	7RMPS4-400250	7RMPS6-400250	8.125	4.063	2.625	2.63
4" x 3"	7RMPS4-400300	7RMPS6-400300	8.125	4.063	2.625	2.52
6" x 2"	7RMPS4-600200	7RMPS6-600200	13.000	6.500	3.625	7.35
6" x 3"	7RMPS4-600300	7RMPS6-600300	13.000	6.500	3.625	7.45
6" x 4"	7RMPS4-600400	7RMPS6-600400	13.000	6.500	3.750	7.15
8" x 2"	7RMPS4-800200	7RMPS6-800200	15.750	7.875	5.000	9.30
8" x 3"	7RMPS4-800300	7RMPS6-800300	15.750	7.875	5.125	9.70
8" x 4"	7RMPS4-800400	7RMPS6-800400	15.750	7.875	5.125	9.45
8" x 6"	7RMPS4-800600	7RMPS6-800600	15.750	7.875	5.125	9.75
10" x 8"	7RMPS4-1000800	7RMPS6-1000800	18.750	9.375	6.15	21.14
12" x 10"	7RMPS4-12001000	7RMPS6-12001000	11.750	5.875	7.15	27.03

Male NPT x Clamp Adapters

Size (OD x NPT)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1/2"	--	21MP6-050	1.625	0.782	0.22
3/4"	--	21MP6-075	1.787	0.794	0.25
3/4" x 1/2"	--	21MP6-075050	2.000	0.782	0.26
1"	21MP4-100	21MP6-100	2.250	0.985	0.80
1" x 1/8"	--	21MP6-1000125	2.187	0.392	0.55
1" x 1/4"	--	21MP6-100025	2.161	0.595	0.58
1" x 3/8"	--	21MP6-100375	3.187	0.600	0.60
1" x 1/2"	--	21MP6-100050	2.187	0.782	0.60
1" x 3/4"	--	21MP6-100075	2.187	0.794	0.65
1-1/2"	21MP4-150	21MP6-150	2.250	1.025	0.90
1-1/2" x 1/8"	--	21MP6-150125	2.187	0.392	0.51
1-1/2" x 1/4"	--	21MP6-150025	2.161	0.595	0.54
1-1/2" x 3/8"	--	21MP6-150375	2.187	0.600	0.56
1-1/2" x 1/2"	--	21MP6-150050	2.187	0.782	0.58
1-1/2" x 3/4"	--	21MP6-150075	2.187	0.794	0.60
1-1/2" x 1"	--	21MP6-150100	2.437	0.985	0.62
1-1/2" x 1-1/4"	--	21MP6-150125	2.438	1.009	0.57
2"	21MP4-200	21MP6-200	2.638	1.058	1.88
2" x 1/2"	--	21MP6-200050	2.188	0.782	0.71
2" x 3/4"	--	21MP6-200075	2.188	0.794	0.71
2" x 1"	--	21MP6-200100	2.469	0.985	0.82
2" x 1-1/2"	--	21MP6-200150	2.625	1.009	0.74
2-1/2"	21MP4-250	21MP6-250	2.875	1.571	1.90
2-1/2" x 1-1/2"	--	21MP6-250150	2.781	1.025	1.84
2-1/2" x 2"	--	21MP6-250200	2.781	1.058	1.20
3"	21MP4-300	21MP6-300	3.070	1.634	3.00
3" x 2"	--	21MP6-300200	3.000	1.058	3.09
4"	21MP4-400	21MP6-400	3.155	1.734	4.00
4" x 3"	--	21MP6-400300	3.813	1.634	3.98



Female NPT x Clamp Adapters




Size (OD x NPT)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1/2"	--	22MP6-050	1.50	0.24
3/4"	--	22MP6-075	1.625	0.27
3/4" x 1/2"	--	22MP6-075050	1.500	0.21
1"	22MP4-100	22MP6-100	1.625	0.82
1" x 1/8"	--	22MP6-1000125	3.281	1.12
1" x 1/4"	--	22MP6-100025	1.625	1.11
1" x 3/8"	--	22MP6-100375	1.625	1.10
1" x 1/2"	--	22MP6-100050	1.625	1.08
1" x 3/4"	--	22MP6-100075	1.625	1.02
1-1/2"	22MP4-150	22MP6-150	2.250	1.00
1-1/2" x 1/8"	--	22MP6-150125	2.500	1.04
1-1/2" x 1/4"	--	22MP6-150025	1.625	1.02
1-1/2" x 3/8"	--	22MP6-150375	1.625	1.01
1-1/2" x 1/2"	--	22MP6-150050	1.625	0.98
1-1/2" x 3/4"	--	22MP6-150075	1.625	0.92
1-1/2" x 1"	--	22MP6-150100	2.250	0.72
1-1/2" x 1-1/4"	--	22MP6-150125	2.250	0.70
2"	22MP4-200	22MP6-200	2.406	1.38
2" x 1/2"	--	22MP6-200050	1.687	1.38
2" x 3/4"	--	22MP6-200075	1.687	1.35
2" x 1"	--	22MP6-200100	1.687	1.49
2" x 1-1/2"	--	22MP6-200150	2.344	1.59
2-1/2"	22MP4-250	22MP6-250	2.187	1.45
2-1/2" x 1-1/2"	--	22MP6-250150	1.656	1.76
2-1/2" x 2"	--	22MP6-250200	2.093	1.88
3"	22MP4-300	22MP6-300	2.187	1.75
3" x 2"	--	22MP6-300200	2.187	3.16
4"	22MP4-400	22MP6-400	2.625	2.72
4" x 3"	--	22MP6-400300	2.187	3.01

Clamp x Schedule 5S Weld Adapters




Size (Tube OD)	Part Number		Dimensions				Weight (lbs.)
	304	316L	A	B	C	Pipe Wall	
1 "	19MPV4-100	19MPV6-100	1.125	1.185	1.315	0.065	0.25
1-1/2"	19MPV4-150	19MPV6-150	1.125	1.770	1.900	0.065	0.29
2 "	19MPV4-200	19MPV6-200	1.125	2.245	2.375	0.065	0.36
2-1/2"	19MPV4-250	19MPV6-250	1.125	2.709	2.875	0.083	0.45
3 "	19MPV4-300	19MPV6-300	1.125	3.334	3.500	0.083	0.71
4 "	19MPV4-400	19MPV6-400	1.125	4.334	4.500	0.083	1.23



Clamp x Schedule 10S Weld Adapters



Size (Tube OD)	Part Number		Dimensions				Weight (lbs.)
	304	316L	A	B	C	Pipe Wall	
1/2"	--	19MPX6-050	1.125	0.622	0.84	0.109	0.48
3/4"	--	19MPX6-075	1.125	0.832	1.05	0.109	0.60
1 "	19MPX4-100	19MPX6-100	1.125	1.097	1.315	0.109	0.31
1-1/2"	19MPX4-150	19MPX6-150	1.125	1.682	1.900	0.109	0.37
2 "	19MPX4-200	19MPX6-200	1.125	2.157	2.375	0.109	0.43
2-1/2"	19MPX4-250	19MPX6-250	1.125	2.635	2.875	0.120	0.52
3 "	19MPX4-300	19MPX6-300	1.125	3.260	3.500	0.120	0.83
4 "	19MPX4-400	19MPX6-400	1.125	4.260	4.500	0.120	1.35



Clamp x 150# FF Flange Adapters



Size (Tube OD)	Part Number		Dimensions					Weight (lbs.)
	304	316L	A	B	C	D	Holes Count	
1 "	FLGTC4-100	FLGTC6-100	4.250	0.625	3.125	1.625	4	2.10
1-1/2"	FLGTC4-150	FLGTC6-150	5.000	0.625	3.875	1.625	4	2.70
2 "	FLGTC4-200	FLGTC6-200	6.000	0.750	4.750	1.750	4	3.75
2-1/2"	FLGTC4-250	FLGTC6-250	7.000	0.750	5.500	1.750	4	4.95
3 "	FLGTC4-300	FLGTC6-300	7.500	0.750	6.000	1.750	4	5.45
4 "	FLGTC4-400	FLGTC6-400	9.000	0.750	7.500	1.750	8	7.35
5 "	FLGTC4-500	FLGTC6-500	10.000	0.750	8.500	1.750	8	8.40
6 "	FLGTC4-600	FLGTC6-600	11.000	0.875	9.500	2.188	8	9.70
8 "	FLGTC4-800	FLGTC6-800	13.500	0.875	8.031	2.188	8	13.60
10 "	FLGTC4-1000	FLGTC6-1000	16.000	0.875	10.031	2.188	12	22.25
12 "	FLGTC4-1200	FLGTC6-1200	19.000	0.875	12.063	2.188	12	31.80

Notes:

- 150# Bolting Pattern
- Reducing Sizes available upon request

Clamp Laterals



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1 "	28AMP4-100	28AMP6-100	7.000	1.500	5.500	0.90
1-1/2"	28AMP4-150	28AMP6-150	8.375	1.688	6.688	1.15
2 "	28AMP4-200	28AMP6-200	9.750	2.125	7.625	1.82
2-1/2"	28AMP4-250	28AMP6-250	11.000	2.000	9.000	2.42
3 "	28AMP4-300	28AMP6-300	11.750	2.375	9.375	3.41
4 "	28AMP4-400	28AMP6-400	14.062	2.640	11.312	7.27
6 "	28AMP4-600	28AMP6-600	19.750	4.375	15.375	11.62

Clamp True Wyes



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	28BMP4-100	28BMP6-100	2.500	2.938	0.90
1-1/2"	28BMP4-150	28BMP6-150	2.500	2.938	1.15
2 "	28BMP4-200	28BMP6-200	3.125	3.750	1.82
2-1/2"	28BMP4-250	28BMP6-250	3.870	4.625	2.42
3 "	28BMP4-300	28BMP6-300	4.500	5.375	3.41
4 "	28BMP4-400	28BMP6-400	6.000	6.000	7.27
6 "	28BMP4-600	28BMP6-600	8.875	8.875	10.49



Clamp 180° Return Bends



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	2UMP4-100	2UMP6-100	3.000	2.500	0.57
1-1/2"	2UMP4-150	2UMP6-150	4.500	3.500	0.81
2 "	2UMP4-200	2UMP6-200	6.000	4.500	1.33
2-1/2"	2UMP4-250	2UMP6-250	7.500	5.500	2.02
3 "	2UMP4-300	2UMP6-300	9.000	6.500	2.55
4 "	2UMP4-400	2UMP6-400	12.000	8.625	3.70
6 "	2UMP4-600	2UMP6-600	18.000	12.875	5.30



Clamp Crosses



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	9MP4-100	9MP6-100	4.750	2.375	1.10
1-1/2"	9MP4-150	9MP6-150	5.500	2.750	1.23
2 "	9MP4-200	9MP6-200	7.000	3.500	1.45
2-1/2"	9MP4-250	9MP6-250	7.000	3.500	1.95
3 "	9MP4-300	9MP6-300	7.500	3.750	2.43
4 "	9MP4-400	9MP6-400	9.000	4.500	4.12

Polished Spool Assemblies




Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A (min.)	A (max.)	
1/2 "	SPOOL4050	SPOOL6050	1.625	241.000	.1375 / lbs in.
3/4 "	SPOOL4075	SPOOL6075	1.625	241.000	.105 / lbs in.
1 "	SPOOL4100	SPOOL6100	1.625	241.000	.340 / lbs in.
1-1/2"	SPOOL4150	SPOOL6150	1.625	241.000	.273 / lbs in.
2 "	SPOOL4200	SPOOL6200	1.625	241.000	.386 / lbs in.
2-1/2"	SPOOL4250	SPOOL6250	1.625	241.000	.498 / lbs in.
3 "	SPOOL4300	SPOOL6300	1.625	241.000	.570 / lbs in.
4 "	SPOOL4400	SPOOL6400	2.250	241.000	1.108 / lbs in.
6 "	SPOOL4600	SPOOL6600	3.000	241.000	2.647 / lbs in.
8 "	SPOOL4800	SPOOL6800	3.000	241.000	3.266 / lbs in.

Notes:

- Other Configurations available upon request. Call Sanitube for information.

Clamp Sight Glasses

Size (Tube OD)	Part Number	Dimensions		Working Pressure (PSI)	Weight (lbs.)
		A	B		
1 "	TCSG-100	6.250	3.125	145	0.90
1-1/2"	TCSG-150	6.250	3.125	145	1.15
2 "	TCSG-200	6.375	4.000	145	1.82
2-1/2"	TCSG-250	6.875	4.500	120	2.42
3 "	TCSG-300	7.000	5.000	120	3.41
4 "	TCSG-400	6.750	6.000	95	7.27



Notes:

- T316 Stainless Steel
- Pyrex Glass with Stainless Steel Safety Shield
- Field serviceable
- Maximum operating temperature: 200°F
- Maximum operating pressure: 95 to 145 psi dependent on size
- Working PSI/temp. assume absence of thermal shock
- Silicone Seats

Clamp Gaskets

Size (Tube OD)	Material					Weight (lbs.)
	Buna	EPDM	Teflon®	Viton®	White Silicone	
1/2"	GTCB-050	GTCE-050	GTCT-050	GTCV-050	GTCSW-050	0.01
3/4"	GTCB-075	GTCE-075	GTCT-075	GTCV-075	GTCSW-075	0.01
1 "	GTCB-100	GTCE-100	GTCT-100	GTCV-100	GTCSW-100	0.01
1-1/2"	GTCB-150	GTCE-150	GTCT-150	GTCV-150	GTCSW-150	0.01
2 "	GTCB-200	GTCE-200	GTCT-200	GTCV-200	GTCSW-200	0.01
2-1/2"	GTCB-250	GTCE-250	GTCT-250	GTCV-250	GTCSW-250	0.01
3 "	GTCB-300	GTCE-300	GTCT-300	GTCV-300	GTCSW-300	0.02
4 "	GTCB-400	GTCE-400	GTCT-400	GTCV-400	GTCSW-400	0.02
6 "	GTCB-600	GTCE-600	GTCT-600	GTCV-600	GTCSW-600	0.03
8 "	GTCB-800	GTCE-800	GTCT-800	GTCV-800	GTCSW-800	0.05
10 "	GTCB-1000	GTCE-1000	GTCT-1000	GTCV-1000	GTCSW-1000	0.11
12 "	GTCB-1200	GTCE-1200	GTCT-1200	GTCV-1200	GTCSW-1200	0.13



Type 1 - Standard
1/2" - 3/4"



Type 1 - Standard
1" and larger


Bevel Seat Fittings



Long Plain Bevel Seat Ferrules




Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	14A4-100	14A6-100	1.375	0.870	0.14
1-1/2 "	14A4-150	14A6-150	1.500	1.370	0.23
2 "	14A4-200	14A6-200	1.500	1.870	0.34
2-1/2 "	14A4-250	14A6-250	1.750	2.370	0.49
3 "	14A4-300	14A6-300	1.750	2.870	0.65
4 "	14A4-400	14A6-400	1.750	3.834	1.09



Long Threaded Bevel Seat Ferrules



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	15A4-100	15A6-100	1.375	0.870	0.09
1-1/2 "	15A4-150	15A6-150	1.500	1.370	0.29
2 "	15A4-200	15A6-200	1.500	1.870	0.38
2-1/2 "	15A4-250	15A6-250	1.750	2.370	0.63
3 "	15A4-300	15A6-300	1.750	2.870	0.87
4 "	15A4-400	15A6-400	1.750	3.834	1.29



Union Hexagonal Nuts




Size (Tube OD)	Part Number	Dimensions		Weight (lbs.)
		A	B	
1 "	13H-100	0.906	1.812	0.25
1-1/2"	13H-150	0.968	2.406	0.44
2 "	13H-200	1.062	3.000	0.75
2-1/2"	13H-250	1.187	3.594	1.25
3 "	13H-300	1.281	4.188	1.81
4 "	13H-400	1.500	5.438	3.63

Notes:

- All Hex Nuts are T304 Stainless Steel
- 400 PSI maximum tolerance


Plain Bevel Seat Solid End Caps

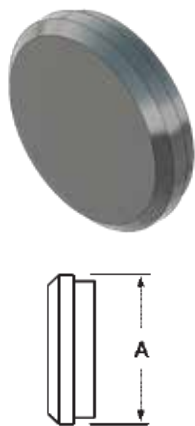

Size (Tube OD)	Part Number		Dimensions	Weight (lbs.)
	304	316L	A	
1 "	16A4-100	16A6-100	1.312	0.10
1-1/2"	16A4-150	16A6-150	1.843	0.30
2 "	16A4-200	16A6-200	2.375	0.70
2-1/2"	16A4-250	16A6-250	2.906	1.10
3 "	16A4-300	16A6-300	3.437	1.70
4 "	16A4-400	16A6-400	4.500	3.50

Bevel Seat Gaskets

Size (Tube OD)	Part Number	
	Buna	PTFE (Teflon®)
1 "	GBSB-100	GBST-100
1-1/2 "	GBSB-150	GBST-150
2 "	GBSB-200	GBST-200
2-1/2 "	GBSB-250	GBST-250
3 "	GBSB-300	GBST-300
4 "	GBSB-400	GBST-400

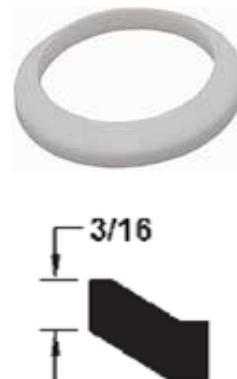


Notes:


- PTFE (Teflon®) is a material subject to plastic flow. When cycled through heat and then cooled down in process lines, PTFE gaskets will not return to their original configuration. They will continue to compress as the cycling continues. This plastic flow will allow leakage if clamp torques are not maintained.
- Refer to Compound Selection Guide for compatibility information.

Plain Bevel Seat x Plain Bevel Seat with Hex Nut 90° Elbow

Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	2E4-100	--	2.218	--	1.48
1-1/2 "	2E4-150	--	2.968	--	1.64
2 "	2E4-200	--	3.750	--	2.64
2-1/2 "	2E4-250	--	4.625	--	4.05
3 "	2E4-300	--	5.406	--	6.84
4 "	2E4-400	--	7.031	--	9.13




Threaded Bevel Seat x Threaded Bevel Seat 90° Elbow



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	2C4-100	--	2.218	--	0.61
1-1/2 "	2C4-150	--	2.968	--	0.67
2 "	2C4-200	--	3.750	--	0.95
2-1/2 "	2C4-250	--	4.625	--	1.36
3 "	2C4-300	--	5.406	--	1.78
4 "	2C4-400	--	7.031	--	3.47

Threaded Bevel Seat x Plain Bevel Seat with Hex Nut 90° Elbow




Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	2F4-100	--	2.218	--	0.97
1-1/2 "	2F4-150	--	2.968	--	1.09
2 "	2F4-200	--	3.750	--	1.82
2-1/2 "	2F4-250	--	4.625	--	2.93
3 "	2F4-300	--	5.406	--	4.10
4 "	2F4-400	--	7.031	--	9.73

Threaded Bevel Seat x Plain Bevel Seat with Hex Nut 45° Elbow




Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	2P4-100	--	1.313	2.125	0.49
1-1/2 "	2P4-150	--	1.655	2.125	0.58
2 "	2P4-200	--	2.125	2.313	0.97
2-1/2 "	2P4-250	--	2.625	2.563	1.46
3 "	2P4-300	--	3.125	2.906	2.05
4 "	2P4-400	--	4.250	3.875	4.36




Threaded Bevel Seat x Threaded Bevel Seat 45° Elbow



Size (Tube OD)	Part Number		Dimensions	Weight (lbs.)
	304	316L	A	
1 "	2K4-100	--	1.313	0.25
1-1/2 "	2K4-150	--	1.655	0.29
2 "	2K4-200	--	2.125	0.48
2-1/2 "	2K4-250	--	2.625	0.73
3 "	2K4-300	--	3.125	1.03
4 "	2K4-400	--	4.250	2.18




Plain Bevel Seat with Hex Nut x Plain Bevel Seat with Hex Nut Concentric Reducer



Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1-1/2" x 1"	3114F4-150100	--	4.094	1.42
2" x 1"	3114F4-200100	--	6.094	1.87
2" x 1-1/2"	3114F4-200150	--	4.219	2.01
2-1/2" x 1-1/2"	3114F4-250150	--	6.344	5.25
2-1/2" x 2"	3114F4-250200	--	4.219	5.12
3" x 2"	3114F4-300200	--	6.406	5.64
3" x 2-1/2"	3114F4-300250	--	4.594	4.38
4" x 2-1/2"	3114F4-400250	--	8.969	7.29
4" x 3"	3114F4-400300	--	6.969	7.21

Plain Bevel Seat x Threaded Bevel Seat Concentric Reducer (Hex Nut Not Included)




Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1-1/2" x 1"	3115F4-150100	--	3.406	0.59
2" x 1"	3115F4-200100	--	5.406	0.74
2" x 1-1/2"	3115F4-200150	--	3.437	0.65
2-1/2" x 1-1/2"	3115F4-250150	--	5.437	3.43
2-1/2" x 2"	3115F4-250200	--	3.437	3.00
3" x 2"	3115F4-300200	--	5.625	3.00
3" x 2-1/2"	3115F4-300250	--	3.750	1.28
4" x 2-1/2"	3115F4-400250	--	8.062	2.60
4" x 3"	3115F4-400300	--	6.125	2.00

Threaded Bevel Seat x Threaded Bevel Seat Concentric Reducer




Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1-1/2" x 1"	31TT4-150100	--	3.406	0.59
2" x 1"	31TT4-200100	--	3.781	0.74
2" x 1-1/2"	31TT4-200150	--	3.438	0.65
2-1/2" x 1-1/2"	31TT4-250150	--	3.906	3.43
2-1/2" x 2"	31TT4-250200	--	3.563	3.00
3" x 2"	31TT4-300200	--	5.625	3.00
3" x 2-1/2"	31TT4-300250	--	5.406	1.28
4" x 2-1/2"	31TT4-400250	--	8.062	2.60
4" x 3"	31TT4-400300	--	5.937	2.00



Threaded Bevel Seat x Plain Bevel Seat with Hex Nut Concentric Reducer



Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1-1/2" x 1"	31TP4-150100	--	4.062	0.89
2" x 1"	31TP4-200100	--	4.062	1.27
2" x 1-1/2"	31TP4-200150	--	4.219	1.18
2-1/2" x 1-1/2"	31TP4-250150	--	6.219	2.93
2-1/2" x 2"	31TP4-250200	--	4.219	3.03
3" x 2"	31TP4-300200	--	6.281	3.83
3" x 2-1/2"	31TP4-300250	--	4.594	2.57
4" x 3"	31TP4-400300	--	5.937	5.40




Plain Bevel Seat with Hex Nut x Plain Bevel Seat with Hex Nut Eccentric Reducer



Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1-1/2" x 1"	3214F4-150100	--	4.094	1.42
2" x 1"	3214F4-200100	--	6.094	1.87
2" x 1-1/2"	3214F4-200150	--	4.219	2.01
2-1/2" x 1-1/2"	3214F4-250150	--	6.344	5.25
2-1/2" x 2"	3214F4-250200	--	4.219	5.12
3" x 2"	3214F4-300200	--	6.406	5.64
3" x 2-1/2"	3214F4-300250	--	4.594	4.38
4" x 2-1/2"	3214F4-400250	--	8.969	7.29
4" x 3"	3214F4-400300	--	6.969	7.21

Plain Bevel Seat x Threaded Bevel Seat Eccentric Reducer (Hex Nut Not Included)

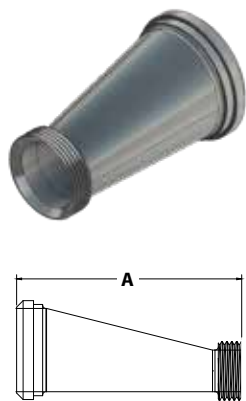


Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1-1/2" x 1"	3215F4-150100	--	3.406	0.59
2" x 1"	3215F4-200100	--	5.406	0.74
2" x 1-1/2"	3215F4-200150	--	3.437	0.65
2-1/2" x 1-1/2"	3215F4-250150	--	5.437	3.43
2-1/2" x 2"	3215F4-250200	--	3.437	3.00
3" x 2"	3215F4-300200	--	5.625	3.00
3" x 2-1/2"	3215F4-300250	--	3.750	1.28
4" x 2-1/2"	3215F4-400250	--	8.062	2.60
4" x 3"	3215F4-400300	--	6.125	2.00

Light Wall Tank Plain Bevel Seat Ferrule




Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1 "	14WL4-100	--	2.000	0.870	1.000	0.25
1-1/2"	14WL4-150	--	2.250	1.370	1.500	0.26
2 "	14WL4-200	--	2.500	1.870	2.000	0.44
2-1/2"	14WL4-250	--	2.750	2.370	2.500	0.70
3 "	14WL4-300	--	3.000	2.870	3.000	1.03
4 "	14WL4-400	--	4.000	3.834	4.000	1.47

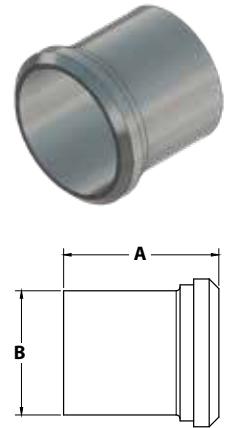


Light Wall Tank Threaded Bevel Seat Ferrule



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1 "	15WL4-100	--	2.000	0.870	1.000	0.25
1-1/2"	15WL4-150	--	2.250	1.370	1.500	0.26
2 "	15WL4-200	--	2.500	1.870	2.000	0.44
2-1/2"	15WL4-250	--	2.750	2.370	2.500	0.70
3 "	15WL4-300	--	3.000	2.870	3.000	1.03
4 "	15WL4-400	--	4.000	3.834	4.000	1.47

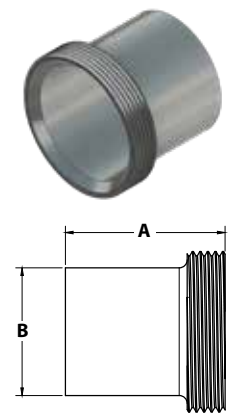


Plain Bevel Seat Tygon Hose Adapter



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	14AHT4-100	--	4.688	1.000	0.31
1-1/2"	14AHT4-150	--	4.719	1.500	0.33
2 "	14AHT4-200	--	4.719	2.000	0.46
2-1/2"	14AHT4-250	--	4.844	2.500	0.70
3 "	14AHT4-300	--	4.906	3.000	0.91
4 "	14AHT4-400	--	5.219	4.000	1.48

Threaded Bevel Seat Tygon Hose Adapter



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	15AHT4-100	--	4.688	1.000	0.31
1-1/2"	15AHT4-150	--	4.719	1.500	0.33
2 "	15AHT4-200	--	4.719	2.000	0.46
2-1/2"	15AHT4-250	--	4.844	2.500	0.70
3 "	15AHT4-300	--	4.906	3.000	0.91
4 "	15AHT4-400	--	5.219	4.000	1.48

Plain Bevel Seat Rubber Hose Adapter



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1 "	14AHR4-100	--	1.688	0.813	1.000	0.29
1-1/2"	14AHR4-150	--	1.688	1.313	1.500	0.27
2 "	14AHR4-200	--	2.344	1.813	2.000	0.47
2-1/2"	14AHR4-250	--	2.344	2.313	2.500	0.55
3 "	14AHR4-300	--	3.500	2.813	3.000	0.80
4 "	14AHR4-400	--	4.000	3.813	4.000	1.32




Long Threaded Bevel Seat Ferrules



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1 "	15AHR4-100	--	1.688	0.813	1.000	0.29
1-1/2"	15AHR4-150	--	1.688	1.313	1.500	0.27
2 "	15AHR4-200	--	2.344	1.813	2.000	0.47
2-1/2"	15AHR4-250	--	3.000	2.313	2.500	0.55
3 "	15AHR4-300	--	3.500	2.813	3.000	0.80
4 "	15AHR4-400	--	4.000	3.813	4.000	1.32




Threaded Bevel Seat x Threaded Bevel Seat Run x Threaded Bevel Seat Branch Straight Tee



Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	74-100	--	1.813	3.625	0.78
1-1/2"	74-150	--	2.375	4.750	0.82
2 "	74-200	--	2.783	5.563	1.43
2-1/2"	74-250	--	3.188	6.375	1.74
3 "	74-300	--	3.500	7.000	2.28
4 "	74-400	--	4.656	9.313	4.23

Threaded Bevel Seat x Threaded Bevel Seat Run x Plain Bevel Seat with Hex Nut Straight Tee



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1 "	7A4-100	--	1.813	3.625	2.688	1.08
1-1/2"	7A4-150	--	2.375	4.750	3.406	1.35
2 "	7A4-200	--	2.783	5.563	3.813	2.26
2-1/2"	7A4-250	--	3.188	6.375	4.250	3.03
3 "	7A4-300	--	3.500	7.000	4.625	4.09
4 "	7A4-400	--	4.656	9.313	5.125	7.63

Threaded Bevel Seat x Plain Bevel Seat with Hex Nut Run x Threaded Bevel Seat Branch Straight Tee



Size (Tube OD)	Part Number		Dimensions			Weight (lbs.)
	304	316L	A	B	C	
1 "	7B4-100	--	1.813	3.625	4.500	1.08
1-1/2"	7B4-150	--	2.375	4.750	5.781	1.35
2 "	7B4-200	--	2.783	5.563	6.594	2.26
2-1/2"	7B4-250	--	3.188	6.375	7.438	3.03
3 "	7B4-300	--	3.500	7.000	8.125	4.09
4 "	7B4-400	--	4.656	9.313	10.781	7.63




I-Line Fittings



Male Short Weld I-Line Ferrules



Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1 "	14WI4-100	14WI6-100	0.600	0.25
1-1/2"	14WI4-150	14WI6-150	0.765	0.25
2 "	14WI4-200	14WI6-200	0.790	0.50
2-1/2"	14WI4-250	14WI6-250	0.848	0.60
3 "	14WI4-300	14WI6-300	0.906	1.00
4 "	14WI4-400	14WI6-400	1.031	1.50
6 "	14WI4-600	14WI6-600	.940	1.51



Female Short Weld I-Line Ferrules



Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1 "	15WI4-100	15WI6-100	0.785	0.25
1-1/2"	15WI4-150	15WI6-150	0.950	0.25
2 "	15WI4-200	15WI6-200	1.040	0.50
2-1/2"	15WI4-250	15WI6-250	1.160	0.75
3 "	15WI4-300	15WI6-300	1.220	1.00
4 "	15WI4-400	15WI6-400	1.350	1.50
6 "	15WI4-600	15WI6-600	1.125	1.64



Bolted I-Line Clamps



Size (Tube OD)	Part Number	Service Pressure Rating at 70°F	Service Pressure Rating at 250°F	Dimensions A	Weight (lbs.)
1" - 1-1/2"	13ILB-100-150	1,220	1,100	2.122	0.800
2"	13ILB-200	900	830	2.654	1.140
2-1/2"	13ILB-250	720	660	3.185	1.860
3"	13ILB-300	600	550	3.717	2.160
4"	13ILB-400	570	525	4.820	3.140
6"	13ILB-600	300	200	7.689	5.440

Notes:

- All clamps are T304 Stainless Steel.
- Pressure ratings assume nut tightened to 25 ft/lbs of torque.

Wingnut I-Line Clamps



Size (Tube OD)	Part Number	Service Pressure Rating at 70°F	Service Pressure Rating at 250°F	Dimensions A	Weight (lbs.)
1" - 1-1/2"	13IS-100-150	700	250	2.122	0.570
2"	13IS-200	450	250	2.654	0.760
2-1/2"	13IS-250	450	200	3.185	1.080
3"	13IS-300	350	150	3.717	1.210
4"	13IS-400	200	125	4.820	1.430


Notes:

- All clamps are T304 Stainless Steel.
- Pressure ratings assume nut tightened to 25 ft/lbs of torque.

Male I-Line 90° Elbows



Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1 "	2EI4-100	2EI6-100	2.093	0.76
1-1/2"	2EI4-150	2EI6-150	3.000	0.83
2 "	2EI4-200	2EI6-200	3.781	1.41
2-1/2"	2EI4-250	2EI6-250	4.593	1.66
3 "	2EI4-300	2EI6-300	5.406	2.22
4 "	2EI4-400	2EI6-400	7.031	4.39




Notes:

- Other configurations available upon request. Call Sanitube for information.

Female I-Line 90° Elbows




Size (Tube OD)	Part Number		Dimensions A	Weight (lbs.)
	304	316L		
1 "	2CI4-100	2CI6-100	2.281	0.76
1-1/2"	2CI4-150	2CI6-150	3.188	0.83
2 "	2CI4-200	2CI6-200	4.031	1.41
2-1/2"	2CI4-250	2CI6-250	4.906	1.66
3 "	2CI4-300	2CI6-300	5.718	2.22
4 "	2CI4-400	2CI6-400	7.344	4.39



Notes:

- Other configurations available upon request. Call Sanitube for information.

Female x Male I-Line 90° Elbows




Size (Tube OD)	Part Number		Dimensions		Weight (lbs.)
	304	316L	A	B	
1 "	2FI4-100	2FI6-100	2.281	2.093	0.76
1-1/2"	2FI4-150	2FI6-150	3.188	3.000	0.83
2 "	2FI4-200	2FI6-200	4.031	3.781	1.41
2-1/2"	2FI4-250	2FI6-250	4.906	4.593	1.66
3 "	2FI4-300	2FI6-300	5.718	5.406	2.22
4 "	2FI4-400	2FI6-400	7.344	7.031	4.39

Notes:

- Other configurations available upon request. Call Sanitube for information.

Hexagonal Tube Hangers with Inserts

Size (Tube OD)	Part Number	Dimensions		Weight (lbs.)
		A	B	
1/2"	T24-050	2.800	1.150	0.32
3/4"	T24-075	2.800	1.150	0.33
1 "	T24-100	3.425	1.450	0.36
1-1/2"	T24-150	4.000	2.125	0.45
2 "	T24-200	4.500	2.500	0.50
2-1/2"	T24-250	4.950	3.125	0.66
3 "	T24-300	5.500	3.750	0.74
4 "	T24-400	6.950	4.750	0.92
6 "	T24-600	9.250	6.625	1.39
8 "	T24-800	11.500	8.625	1.92
10 "	T24-1000	4.500	10.500	4.62
12 "	T24-1200	16.625	13.000	7.85

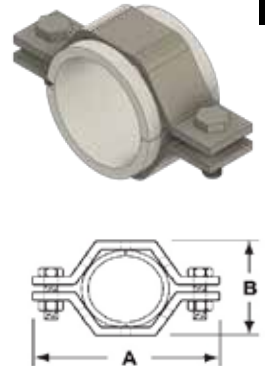

Notes:

- Hanger base is T304 stainless steel. Insert material is Polypropylene.
- Sleeve maximum temperature: 230°F.

Hexagonal Tube Hanger with Nitrile Grommets


Size (Tube OD)	Part Number	Dimensions		Weight (lbs.)
		A	B	
1 "	T24RG-100	3.425	1.450	0.36
1-1/2"	T24RG-150	4.000	2.125	0.45
2 "	T24RG-200	4.500	2.500	0.50
2-1/2"	T24RG-250	4.950	3.125	0.66
3 "	T24RG-300	5.500	3.750	0.74
4 "	T24RG-400	6.950	4.750	0.92



Notes:

- Hanger base is T304 stainless steel.
- Nitrile grommets maximum temperature: 230°F
- All hex and round style hangers can be equipped with the following coupler options:
 - 3/8 NPT
 - all thread: 3/8-16 or 1/2-13

Hexagonal Pipe Hangers with Inserts

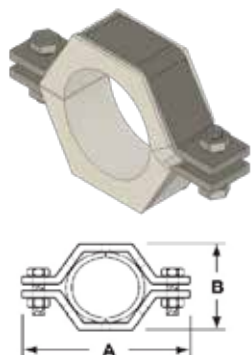

Size (NPS)	Part Number	Dimensions		Weight (lbs.)
		A	B	
1 "	P24-100	3.688	1.875	0.41
1-1/2"	P24-150	4.313	2.563	0.52
2 "	P24-200	4.875	3.125	0.58
2-1/2"	P24-250	5.375	3.875	0.76
3 "	P24-300	6.063	4.250	0.85
4 "	P24-400	7.438	5.250	1.06
6 "	P24-600	9.750	7.735	1.48
8 "	P24-800	12.250	9.375	2.04

Notes:




- Hanger base is T304 stainless steel. Insert material is Polypropylene.
- Sleeve maximum temperature: 230°F.

Stationary Spray Balls

Size (Tube OD)	Spray Pattern			Dimensions			Weight (lbs.)
	360°	180° Top	180° Bottom	A	B	C	
1 "	STC-100-360	--	--	3.040	2.450	1.005	0.38
1 "	--	STC-100-180T	STC-100-180B	3.540	2.950	1.005	0.38
1-1/2"	STC-150-360	STC-150-180T	STC-150-180B	3.540	2.950	1.505	0.52

Notes:

- Sanitube spray balls are stationary. They are designed to be mounted to a tube or pipe.
- All spray balls are 100% T316L stainless steel, polished to a 180 grit finish on the inside and outside.

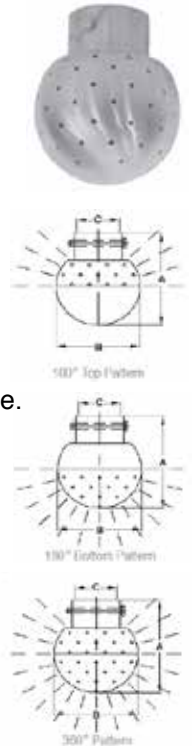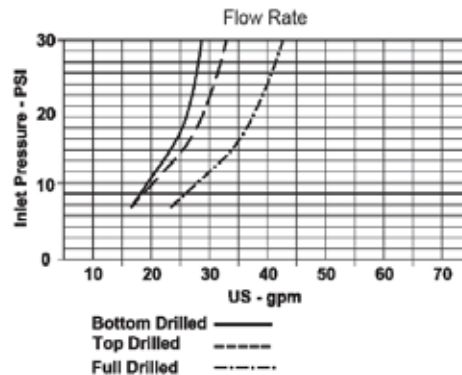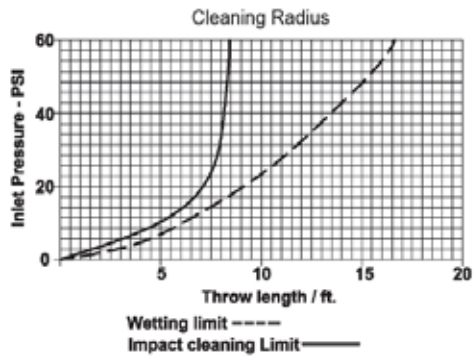




SPRAY BALLS

Rotating Spray Balls

Size (Tube OD)	Type	Part Number		Dimensions				Weight (lbs.)
		304	316L	A	B	C	D	
1 "	Slip-On	--	SRH-100-360	5.625	2.000	1.118	0.445	1.13

Notes:

- All spray balls are 100% T316L stainless steel, polished to a mirror-like finish OD.
- 360° spray pattern.
- Equipped with T316L stainless steel ball bearings to eliminate rust.

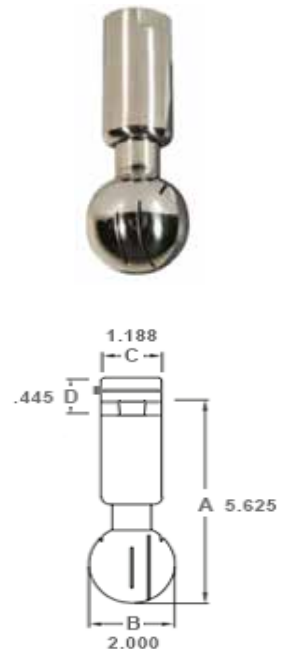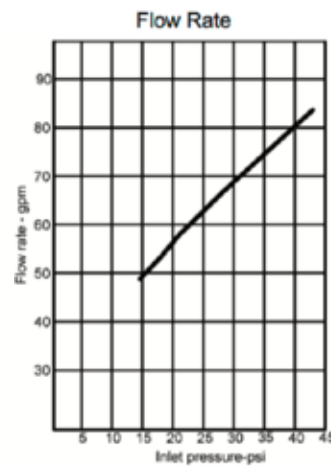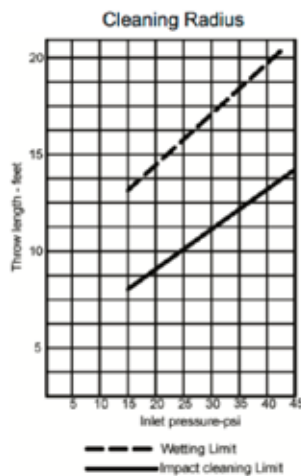

Sani-Flow Pressure Gauges



3-A approved diaphragm pressure gauge designed to endure the harshest environments and function for many years with little or no maintenance. The Sani-Flow pressure gauge has been designed specifically for sanitary applications. Our gauges are extremely accurate yet durable and are available with sanitary fittings in sizes from 1½" to 3", and pressure ranges from 30"Hg (vacuum) up to 1,000 psi.

- 316L Stainless Steel Sanitary Fittings & Diaphragm assures maximum corrosion resistance while providing the most sanitary construction possible.
- 304 Stainless Steel Case for durability even in the harshest environments.
- Polycarbonate Lens is virtually impervious to cracks and breakage.
- Waterproof Construction throughout allows gauge to be submersed for cleaning.
- C.I.P. - can be cleaned in place for convenience and to eliminate the possibility of damage from mishandling.
- Pressure Ranges from 30" Hg vacuum to 1,000 psi.
- Recessed Diaphragm helps to protect sensitive diaphragm from physical abuse.
- True Zero with Re-Zero Feature is standard on all gauges.
- Unique Pulsation Dampening System to insulate the gauge movement from punishing pulsations which shorten the life of an ordinary pressure gauge.
- Glycerine Fill is standard to protect the gear mechanism against wear and vibration.
- 500°F Maximum process temperatures (260°C)*.



King Combination Nipples

Size (Tube OD)	Part Number	Dimensions					Weight (lbs.)
		A	B	C	D	E	
1/4"	RST-025	1.575	0.930	0.354	0.276	0.630	0.16
3/8"	RST-0375	1.634	1.120	0.433	0.433	0.750	0.16
1/2"	RST-050	2.460	1.460	0.570	0.570	0.980	0.16
3/4"	RST-075	2.850	1.690	0.810	0.570	1.220	0.26
1 "	RST-100	3.230	1.970	1.050	0.790	1.500	0.36
1-1/4"	RST-125	3.150	2.090	1.340	1.060	1.810	0.51
1-1/2"	RST-150	3.640	2.200	1.590	1.300	2.050	0.63
2 "	RST-200	4.310	2.760	2.070	1.770	2.560	1.02
2-1/2"	RST-250	5.350	3.660	2.520	2.080	3.150	1.74
3 "	RST-300	5.790	3.820	3.070	2.760	3.780	2.45
4 "	RST400	6.220	4.090	4.090	3.540	4.720	4.47



Notes:

- All king combination nipples are 100% T316L stainless steel.
- Combination nipples are recommended for low-pressure discharge and suction service for compatible liquids. They are not for compressible products such as air or nitrogen on sizes 1 1/4" and above.
- King Combination Nipples are not recommended for steam.
- The working pressure may vary with the construction of the hose, the type of clamping system used and the application.
- In accordance with the Rubber Manufacturers Association bulletin for oil suction and discharge hose, a coupled length of hose in any size should be tested to 1 1/2 times the working pressure and held for fifteen minutes without leaking or coupling movement. For additional information and detailed instruction on testing procedures, see the RMA handbook.

1/2 Inch Thick Tube Flanges



PLATE FLANGES

Size (Tube OD)	Part Number		Dimensions				Holes		Weight (lbs.)
	304L	316L	A	B	C	D	Diameter	Count	
1/2"	38SL4-050	38SL6-050	3.500	0.500	0.503	2.380	5/8"	4	0.99
3/4"	38SL4-075	38SL6-075	3.880	0.500	0.753	2.750	5/8"	4	0.99
1 "	38SL4-100	38SL6-100	4.250	0.500	1.031	3.125	5/8"	4	1.80
1-1/2"	38SL4-150	38SL6-150	5.000	0.500	1.531	3.875	5/8"	4	2.40
2 "	38SL4-200	38SL6-200	6.000	0.500	2.031	4.750	3/4"	4	3.40
2-1/2"	38SL4-250	38SL6-250	7.000	0.500	2.531	5.500	3/4"	4	4.60
3 "	38SL4-300	38SL6-300	7.500	0.500	3.031	6.000	3/4"	4	5.10
4 "	38SL4-400	38SL6-400	9.000	0.500	4.031	7.500	3/4"	8	6.90
5 "	38SL4-500	38SL6-500	10.000	0.500	5.031	8.500	3/4"	8	7.95
6 "	38SL4-600	38SL6-600	11.000	0.500	6.031	9.500	7/8"	8	9.00
8 "	38SL4-800	38SL6-800	13.500	0.500	8.031	11.750	7/8"	8	12.80
10 "	38SL4-1000	38SL6-1000	16.000	0.500	10.031	14.250	1 "	12	20.40
12 "	38SL4-1200	38SL6-1200	19.000	0.500	12.063	17.000	1 "	12	29.50

Notes:

- 150# Bolting Pattern

1/2 Inch Thick Pipe Flanges

Size (NPS)	Part Number		Dimensions				Holes		Weight (lbs.)
	304L	316L	A	B	C	D	Diameter	Count	
1 "	P41-100	P61-100	4.250	0.500	1.360	3.125	5/8"	4	1.70
1-1/4"	P41-125	P61-125	4.625	0.500	1.700	3.500	5/8"	4	2.00
1-1/2"	P41-150	P61-150	5.000	0.500	1.950	3.875	5/8"	4	2.30
2 "	P41-200	P61-200	6.000	0.500	2.440	4.750	3/4"	4	3.20
2-1/2"	P41-250	P61-250	7.000	0.500	2.940	5.500	3/4"	4	4.40
3 "	P41-300	P61-300	7.500	0.500	3.570	6.000	3/4"	4	4.80
4 "	P41-400	P61-400	9.000	0.500	4.570	7.500	3/4"	8	6.50
5 "	P41-500	P61-500	10.000	0.500	5.660	8.500	7/8"	8	7.30
6 "	P41-600	P61-600	11.000	0.500	6.720	9.500	7/8"	8	8.10
8 "	P41-800	P61-800	13.500	0.500	8.720	11.750	7/8"	8	11.60
10 "	P41-1000	P61-1000	16.000	0.500	10.880	14.250	1 "	12	18.40
12 "	P41-1200	P61-1200	19.000	0.500	12.880	17.000	1 "	12	28.00
14 "	P41-1400	P61-1400	21.000	0.500	14.140	18.750	1-1/8"	12	32.70
16 "	P41-1600	P61-1600	23.500	0.500	16.160	21.250	1-1/8"	16	45.40
18 "	P41-1800	P61-1800	25.000	0.500	18.180	22.750	1-1/4"	16	47.60
20 "	P41-2000	P61-2000	27.500	0.500	20.200	25.000	1-1/4"	20	74.10
24 "	P41-2400	P61-2400	32.000	0.500	24.250	29.500	1-3/8"	20	93.50

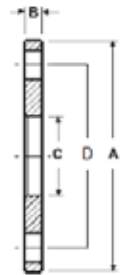





PLATE FLANGES

Notes:

- 150# Bolting Pattern

Custom Fabrication

Sanitube is proud to introduce its new state of the art custom fitting fabrication facility. The production of non-standard fittings now allows Sanitube to offer distributors a single source for not only standard tubing, valves, and fittings, but also custom, made-to-order spool pieces, custom fitting configurations, custom machined parts, and cut to length tubing. Sanitube utilizes modern, technologically advanced welding and fabrication equipment to manufacture superior quality sanitary fittings with one of the lowest lead times in the industry. Contact your Sanitube sales representative with your custom requirements today!

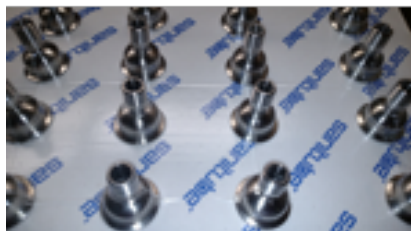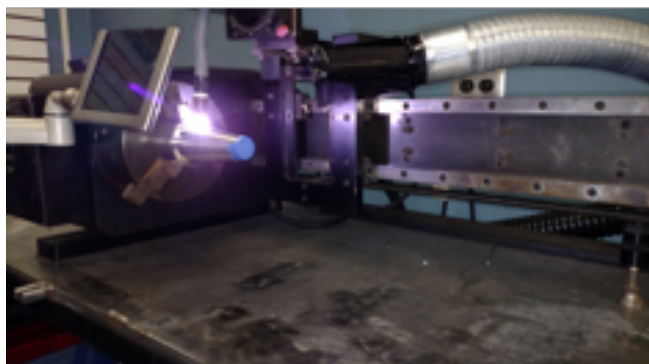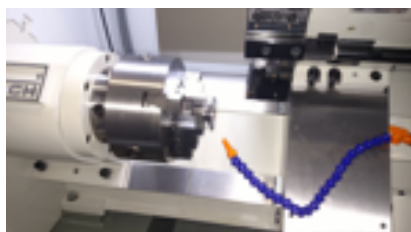

Jacketed Fittings

Maintaining a constant product temperature can be critical in various applications. The physical properties of fluids can change dramatically with variances in temperature. To ensure constant product temperatures, certain processes require sanitary jacketed piping systems. Sanitube manufactures the highest quality dual containment fittings in the industry.


- 316L Wetted Process with 304 Containment Jacket.
- Available: 90° Elbow, 45° Elbow, Straight Tee, Reducing Tee, Eccentric and Concentric Reducer, Tru Wye, Lateral Wye, Long Sweep Elbow, and Spool.
- Several size and end configurations available (e.g. Tri-Clamp, Butt Weld, I-Line).
- ½" or ¾" FNPT Jacket Inlet and Outlet.
- Material Test Reports and Bubble Leak Test Certificate of Compliance available upon request.
- Contact your Local Sanitube Sales Professional for a quote TODAY!



Sanitary Valves



Butt Weld Butterfly Valves

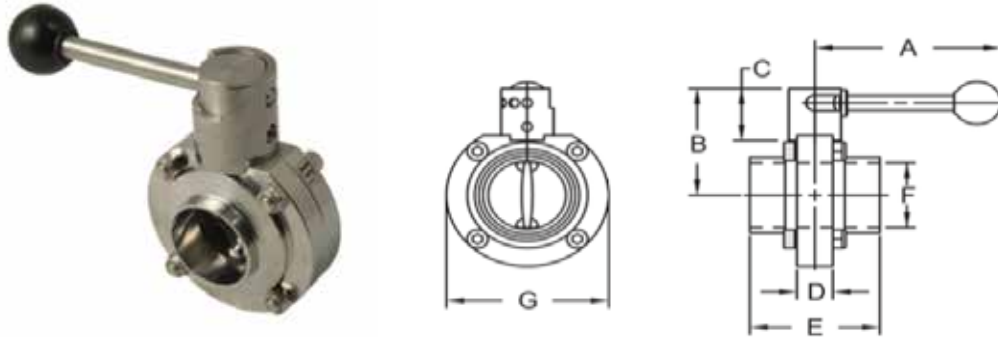


Size (Tube OD)	Part Number		Dimensions							Break Torque in/lbs	Pressure Rating (PSI)	Flow Coefficient (CV)	Weight (lbs.)
	EPDM	Viton®	A	B	C	D	E	F	G				
1 "	BWBFE-100	BWBFV-100	4.400	2.800	1.400	0.900	1.900	0.900	3.100	75	140	23	2.05
1-1/2 "	BWBFE-150	BWBFV-150	4.400	2.800	1.400	0.900	1.900	1.400	3.100	130	140	80	2.75
2 "	BWBFE-200	BWBFV-200	4.400	3.100	1.400	0.900	2.000	1.900	3.900	165	140	230	3.25
2-1/2 "	BWBFE-250	BWBFV-250	4.400	3.500	1.400	0.900	2.100	2.400	4.600	210	110	264	3.45
3 "	BWBFE-300	BWBFV-300	6.200	3.800	1.300	1.200	2.500	2.900	5.200	350	110	372	4.20
4 "	BWBFE-400	BWBFV-400	6.200	4.500	1.300	1.200	3.100	3.800	6.700	540	85	800	8.55
6 "	BWBFE-600	BWBFV-600	11.500	5.500	1.300	1.200	5.500	5.800	8.500	1,550	60	1,200	17.95
8 "	BWBFE-800	BWBFV-800	11.000	8.000	2.000	1.500	4.900	7.800	11.000	1,650	60	2,800	22.85

Key Features:

- T316 Stainless Steel
- Information supplied based on water media at 68°F.
- All wetted surfaces are sanitary finished to <32Ra.
- Field serviceable.
- Seat materials available in EPDM or Viton®.
- Minimal line pressure: 0.4 inches Hg vacuum.
- Operating temperature range: 15°F to 200°F.

Clamp Butterfly Valves

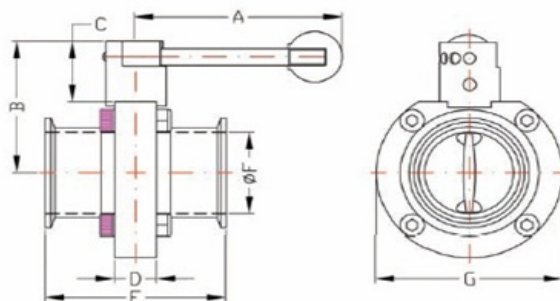


Size (Tube OD)	Part Number		Dimensions							Break Torque in/lbs	Pressure Rating (PSI)	Flow Coefficient (CV)	Weight (lbs.)
	EPDM	Viton®	A	B	C	D	E	F	G				
1 "	TCBFE-100	TCBFV-100	4.400	2.800	1.400	0.900	2.598	0.900	3.100	75	140	23	2.2
1-1/2"	TCBFE-150	TCBFV-150	4.400	2.800	1.400	0.900	2.756	1.400	3.100	130	140	80	2.9
2 "	TCBFE-200	TCBFV-200	4.400	3.100	1.400	0.900	2.756	1.900	3.900	165	140	230	3.5
2-1/2"	TCBFE-250	TCBFV-250	4.400	3.500	1.400	0.900	3.071	2.400	4.600	210	110	264	3.7
3 "	TCBFE-300	TCBFV-300	6.200	3.800	1.300	1.200	3.150	2.900	5.200	350	110	372	4.4
4 "	TCBFE-400	TCBFV-400	6.200	4.500	1.300	1.200	3.465	3.800	6.700	540	85	800	9.0
6 "	TCBFE-600	TCBFV-600	11.500	5.500	1.300	1.200	4.646	5.800	8.500	1,550	60	1,200	18.5
8 "	TCBFE-800	TCBFV-800	11.000	8.000	2.000	1.500	5.250	7.800	11.000	1,650	60	2,800	23.90

Key Features:

- T316 Stainless Steel
- Information supplied based on water media at 68°F.
- All wetted surfaces are sanitary finished to <32Ra.
- Field serviceable.
- Seat materials available in EPDM or Viton®.
- Minimal line pressure: 0.4 inches Hg vacuum.
- Operating temperature range: 15°F to 200°F.

Butterfly Valves Clamp End with Trigger Handle

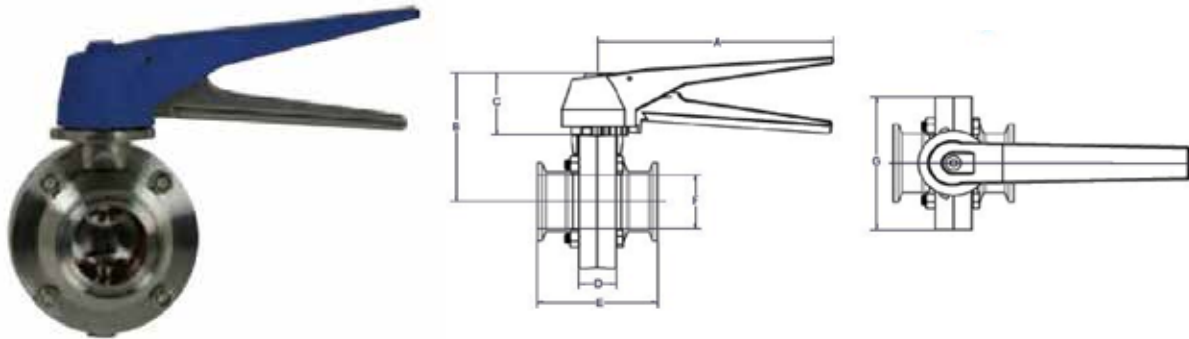

Size (Tube OD)	Part Number	Dimensions							Weight (lbs.)
		A	B	C	D	E	F	G	
1 "	TCBFS4-100	6.490	2.750	1.600	0.790	2.600	0.880	3.070	2.20
1-1/2 "	TCBFS4-150	6.490	3.400	1.600	0.790	2.750	1.375	3.150	2.90
2 "	TCBFS4-200	6.490	3.600	1.600	0.790	2.750	1.900	3.930	3.50
2-1/2 "	TCBFS4-250	6.490	3.750	1.600	0.870	3.070	2.340	4.490	3.70
3 "	TCBFS4-300	6.490	4.200	1.600	0.870	3.150	2.900	4.920	4.40
4 "	TCBFS4-400	6.490	5.100	1.600	0.950	3.470	3.830	6.100	9.00

Key Features:

- T304 Stainless Steel body.
- 100% Tested / 100% inspected.
- All wetted surfaces are sanitary finished to <32Ra.
- Field serviceable (no special tools required).
- Silicone seats.
- Blue trigger handle.
- Operating temperature range: 15°F to 200°F.
- Maximum operating pressure: 110 PSI.

Actuated Clamp Butterfly Valves


Size (Tube OD)	Part Number		Dimensions			
	EPDM	Viton®	Clamp to Clamp	Body Width	Overall Height	Height Center to Top
1 "	TCBFESR-100	TCBFVSR-100	2.598	3.100	10.250	8.563
1-1/2"	TCBFESR-150	TCBFVSR-150	2.756	3.100	10.250	8.563
2 "	TCBFESR-200	TCBFVSR-200	2.756	3.900	11.000	9.000
2-1/2"	TCBFESR-250	TCBFVSR-250	3.071	4.600	11.375	9.250
3 "	TCBFESR-300	TCBFVSR-300	3.150	5.200	12.250	10.250
4 "	TCBFESR-400	TCBFVSR-400	3.465	6.700	13.500	10.250



Minimum Air Pressure	Flow Coefficient (CV)	Weight (lbs.)
50 psi	23	10.0
57 psi	80	9.4
57 psi	230	10.4
66 psi	264	11.6
71 psi	372	12.8
80 psi	800	16.0

Actuator Specifications	Double Acting	Spring Return
Weight	5.1	6.0
Air Consumption	8.5	8.5
Air Consumption	20	18.5
Temperature Rating Maximum	200°F	200°F
Temperature Rating Minimum	15°F	15°F
Output Torque	350	350
Maximum Pressure Rating	120	120
Supply Pressure Required	80-100	80-100
Diameter	3.35	3.35
Height	5.83	5.83
Air Fitting Ports	1/8" FNPT	1/8" FNPT


Component	Description	Material
1	Plug	ABS
2	Bearing	PTFE
3	Seal Ring	Silastic
4	Disc	316
5	Body	316
6	Bolt	304
7	Nut	304
8	Washers	304
9	Brackets	304
10	Coupling Shaft	304
11	Bolt	304
12	Pneumatic Device Casing	304

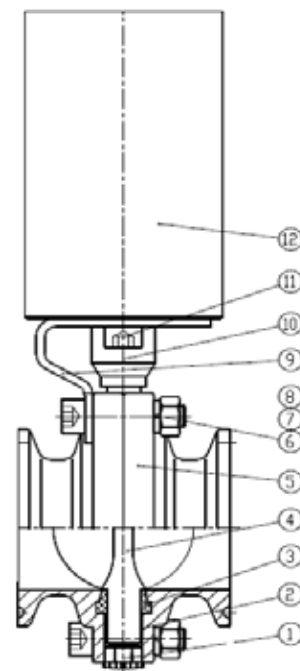

Key Features:

- T316 Stainless Steel.
- Information supplied based on water media at 68°F.
- All wetted surfaces are sanitary finished to <32Ra.
- Field serviceable.
- Seat materials available in EPDM or Viton®.
- Minimum supply air line pressure 80 PSI.
- Operating temperature range: 15°F to 200°F.

Three Piece Encapsulated Clamp Ball Valves

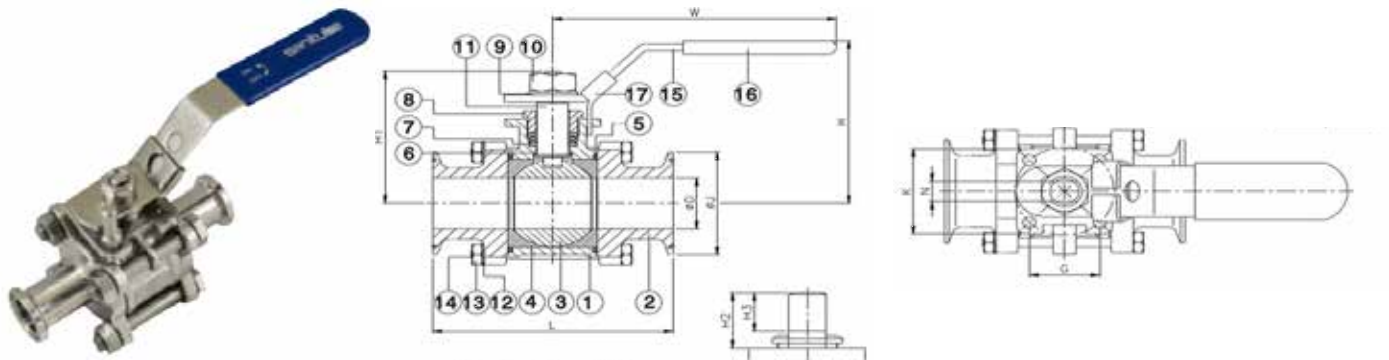

Size (Tube OD)	Part Number	Dimensions												Torque (in/lb)		Weight (lbs.)
		D	W	H	H1	H2	H3	L	G	K	J	N	ISO 5211	Break- away	Action	
1/2"	TCBVS-050	0.380	5.560	2.500	1.910	0.710	0.510	3.583	1.000	1.460	1.000	0.260	F03	31	20	1.7
3/4"	TCBVS-075	0.620	5.560	2.620	2.040	0.740	0.510	4.016	1.000	1.460	1.000	0.260	F03	47	32	2.1
1 "	TCBVS-100	0.870	5.560	2.730	2.150	0.710	0.510	4.528	1.170	1.650	1.990	0.260	F04	105	58	3.0
1-1/2"	TCBVS-150	1.370	7.410	3.960	3.250	1.180	0.770	5.433	1.390	1.970	1.990	0.330	F05	238	115	5.9
2 "	TCBVS-200	1.880	7.410	4.350	3.600	1.140	0.770	6.181	1.390	1.970	2.520	0.330	F05	256	115	9.2
2-1/2"	TCBVS-250	2.370	10.240	5.480	4.610	1.480	1.020	6.693	1.950	2.830	3.050	0.470	F07	900	288	19.2
3 "	TCBVS-300	2.870	10.240	5.830	4.990	1.500	1.020	7.756	1.950	2.830	3.580	0.470	F07	1,650	230	31.3
4 "	TCBVS-400	3.840	11.610	6.890	6.380	2.050	1.380	9.528	2.840	3.700	4.690	0.630	F10	2,027	345	45.2



Key Features:

- T316 Stainless Steel.
- Clamp end.
- Clamp End Working Pressure: 200 PSI WOG.
- Working Temp.: -4°F to 300°F.
- Investment casting.
- Blow-out proof stem.
- Fully Encapsulated.
- Locking handle.
- ISO 5211 mounting pad.
- Full port design.
- Other configurations available upon request. Call Sanitube for information.

Component	Description	Material
1	Body	T316 Stainless Steel
2	Cap	T316 Stainless Steel
3	Ball	T316 Stainless Steel
4	Seat	PTFE
5	Seal	PTFE
6	Thrust Washer	PTFE
7	Stem Packing	PTFE
8	Gland Nut	T304 Stainless Steel
9	Spring Washer	T304 Stainless Steel

Component	Description	Material
10	Stem Nut	T304 Stainless Steel
11	Stem	T316 Stainless Steel
12	Spring Washer	T304 Stainless Steel
13	Nut	T304 Stainless Steel
14	Bolt	T304 Stainless Steel
15	Handle	T304 Stainless Steel
16	Handle Sleeve	PVC
17	Locking Device	T304 Stainless Steel

Three Way Ball Valves

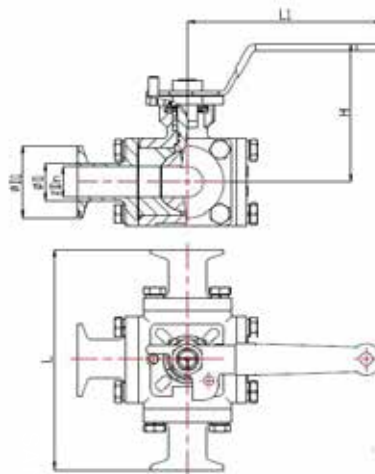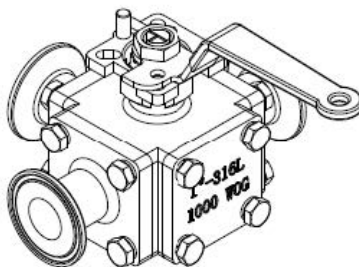


Size	L - Port	T - Port	Dn	D	D1	L	L1	H
1/2"	TCBVS3L-050	TCBVS3T-050	.370	.500	.992	4.645	5.314	3.031
3/4"	TCBVS3L-075	TCBVS3T-075	.622	.750	.992	5.000	5.314	3.070
1"	TCBVS3L-100	TCBVS3T-100	.870	1.000	1.988	5.984	5.314	3.740
1 1/2"	TCBVS3L-150	TCBVS3T-150	1.370	1.500	1.988	6.889	7.125	4.448
2"	TCBVS3L-200	TCBVS3T-200	1.870	2.000	2.519	7.913	7.125	4.763
2 1/2"	TCBVS3L-250	TCBVS3T-250	2.370	2.500	3.051	8.937	7.125	5.314
3"	TCBVS3L-300	TCBVS3T-300	2.870	3.000	3.582	10.315	15.315	5.511
4"	TCBVS3L-400	TCBVS3T-400	3.834	4.000	4.685	12.559	17.165	6.220

Key Features:

- Full port design
- Blow-out proof stem
- Live-loaded stem packing
- T316 stainless body, ends, and ball
- ISO 5211 mounting pad
- Rated to:
 - 1/2" – 2": 1000 PSI WOG
 - 2-1/2" – 4": 800 PSI WOG

Y-Ball Check Valves

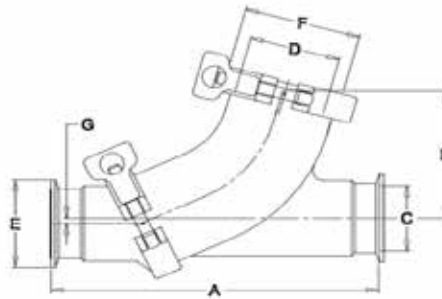


Valve Size	Clamp and Cap Size	Part Number	Dimensions							Ball Diameter	Weight (lbs.)
			A	B	C	D	E	F	G		
1-1/2"	2 "	45BY6-150	7.500	3.300	1.360	1.870	1.980	2.510	0.160	1.6	5.70
2 "	2-1/2"	45BY6-200	8.500	3.900	1.860	2.330	2.510	3.040	0.160	2.1	5.63
2-1/2"	3 "	45BY6-250	10.000	4.500	2.370	2.870	3.040	3.570	0.160	2.7	6.20
3 "	4 "	45BY6-300	11.500	5.300	2.870	3.830	3.570	4.680	0.160	3.6	10.87

Air blow check valves (ABCV) available and in stock.

Key Features:

- Metal product contact surfaces are T316 Stainless Steel.
- Two-piece construction.
- Field serviceable.
- PTFE ball.
- Replacement seat available.
- Operating temperature range: 15°F to 200°F.
- Maximum operating pressure: 150 PSI.

Clamp Check Valves

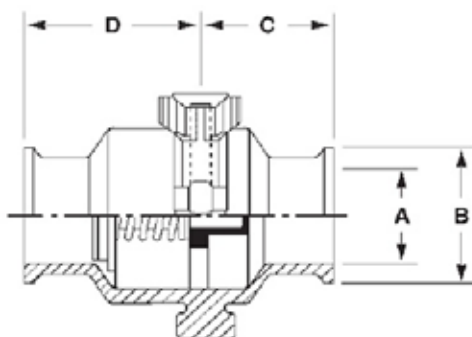

Size (Tube OD)	Part Number	Dimensions			Cracking Pressure (PSI)	Weight (lbs.)
		A	B	C+D		
1/2"	TCCV-050	0.037	0.990	4.125	10.0	1.15
3/4"	TCCV-075	0.620	0.990	4.125	4.0	1.10
1"	TCCV-100	0.870	1.990	4.189	2.5	1.70
1-1/2"	TCCV-150	1.370	1.988	4.189	1.6	1.80
2"	TCCV-200	1.870	2.519	4.583	1.5	2.20
2-1/2"	TCCV-250	2.370	3.051	4.740	0.9	8.50
3"	TCCV-300	2.870	3.582	4.976	0.6	17.80
4"	TCCV-400	3.834	4.682	5.583	0.5	
6"	TCCV-600	5.782	6.630	6.260	Call	


Key Features:

- T316 Stainless Steel.
- Full size flow plate.
- Long stem bushing for increased cycle life.
- Suitable for low and medium viscosity fluids.
- Field serviceable / Viton seat, seals and repair kits also available.
- Maximum operating temperature: 200°F.
- Maximum operating pressure: 145 PSI.
- Other configurations available upon request. Call Sanitube for information.

Industrial Valves



One Piece Threaded Ball Valves

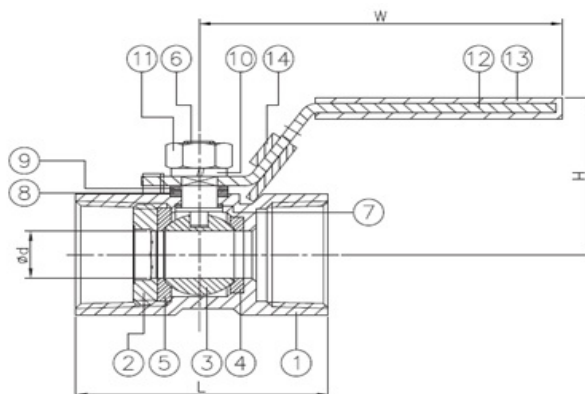


Size (NPS)	Part Number	Dimensions				Weight (lbs.)
		D	L	W	H	
1/4"	BV1-025	0.200	1.540	2.800	1.300	0.2
3/8"	BV1-0375	0.280	1.730	3.580	1.380	0.2
1/2"	BV1-050	0.360	2.170	3.740	1.570	0.4
3/4"	BV1-075	0.490	2.320	3.740	1.730	0.6
1 "	BV1-100	0.590	2.720	4.450	1.970	0.9
1-1/4"	BV1-125	0.790	3.030	4.450	2.240	1.4
1-1/2"	BV1-150	0.980	3.190	5.550	2.520	1.9
2 "	BV1-200	1.260	3.820	5.550	2.680	2.7

Component	Description	Material
1	Body	T316 Stainless Steel
2	Retainer	T316 Stainless Steel
3	Ball	T316 Stainless Steel
4	Seat A	PTFE/RTFE
5	Seat B	PTFE/RTFE
6	Stem	T316 Stainless Steel
7	Thrust Washer	PTFE
8	Packing	PTFE
9	Gland Ring	T304 Stainless Steel
10	Spring Washer	T304 Stainless Steel
11	Stem Nut	T304 Stainless Steel
12	Handle	T304 Stainless Steel
13	Handle Sleeve	Plastic

Notes:

- Reduced port.
- Working Pressure: 1000 PSI WOG (PN63).
- Working Temp.: -4°F to 300°F.
- Investment casting.
- Blow-out proof stem.
- Anti-static device.
- Locking device.
- Thread type: ASTM B1.20.1 (NPT).

Two Piece Threaded Ball Valves

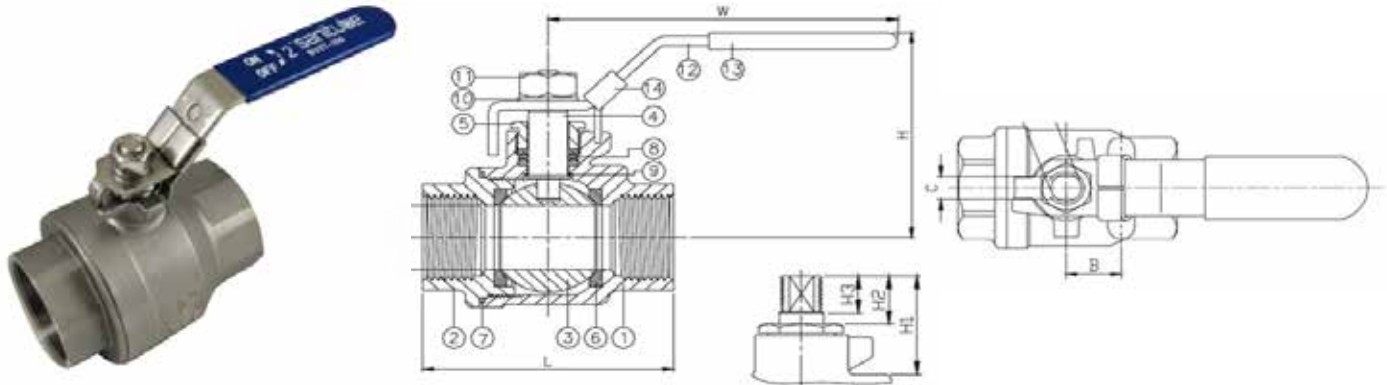


Size (NPS)	Part Number	Dimensions										Torque in/lbs	Weight (lbs.)
		d	L	H	W	B	C	H1	H2	H3	T		
1/4"	BV2T-025	0.460	2.380	1.970	4.020	0.550	0.200	1.280	0.490	0.410	5/16"W	36	0.6
3/8"	BV2T-0375	0.510	2.380	1.970	4.020	0.550	0.200	1.280	0.490	0.410	5/16"W	36	0.6
1/2"	BV2T-050	0.590	2.520	1.970	4.020	0.550	0.200	1.280	0.490	0.410	5/16"W	39	0.7
3/4"	BV2T-075	0.790	3.030	2.440	4.720	0.870	0.260	1.590	0.630	0.530	3/8"W	52	1.2
1 "	BV2T-100	0.980	3.540	2.970	6.260	0.870	0.310	1.970	0.710	0.610	7/16"W	65	1.9
1-1/4"	BV2T-125	1.260	3.940	3.190	6.260	0.940	0.310	1.930	0.670	0.610	7/16"W	78	2.8
1-1/2"	BV2T-150	1.500	4.650	3.860	7.400	0.940	0.350	2.360	0.750	0.690	1/2"W	117	4.4
2 "	BV2T-200	1.970	5.430	4.250	7.400	0.940	0.350	2.440	0.790	0.690	1/2"W	143	6.9
2-1/2"	BV2T-250	2.560	6.560	5.350	9.650	1.380	0.470	3.110	1.220	1.200	3/4"W	390	13.2
3 "	BV2T-300	3.150	7.600	5.790	9.650	1.380	0.470	3.090	1.220	1.200	3/4"W	412	22.3
4 "	BV2T-400	3.940	10.240	7.200	12.600	1.970	0.630	3.900	2.090	1.650	1"W	--	25.0

Component	Description	Material
1	Body	T316 Stainless Steel
2	Cap	T316 Stainless Steel
3	Ball	T316 Stainless Steel
4	Stem	T316 Stainless Steel
5	Gland Nut	T304 Stainless Steel
6	Seat	PTFE/RTFE
7	Seal	PTFE
8	Packing	PTFE/RTFE
9	Thrust Washer	PTFE
10	Spring Washer	T304 Stainless Steel
11	Nut	T304 Stainless Steel
12	Handle	T304 Stainless Steel
13	Handle Sleeve	PVC
14	Locking Device	T304 Stainless Steel

Notes:

- Full port. 1000 PSI WOG (PN63).
- Working Temp.: -4°F to 300°F.
- Investment casting.
- Blow-out proof stem.
- Anti-static device.
- Locking device.
- Length conforms to DIN 3202/4-M3.
- Thread type: ASME B1.20.1 (NPT).

Three Piece Threaded Ball Valves

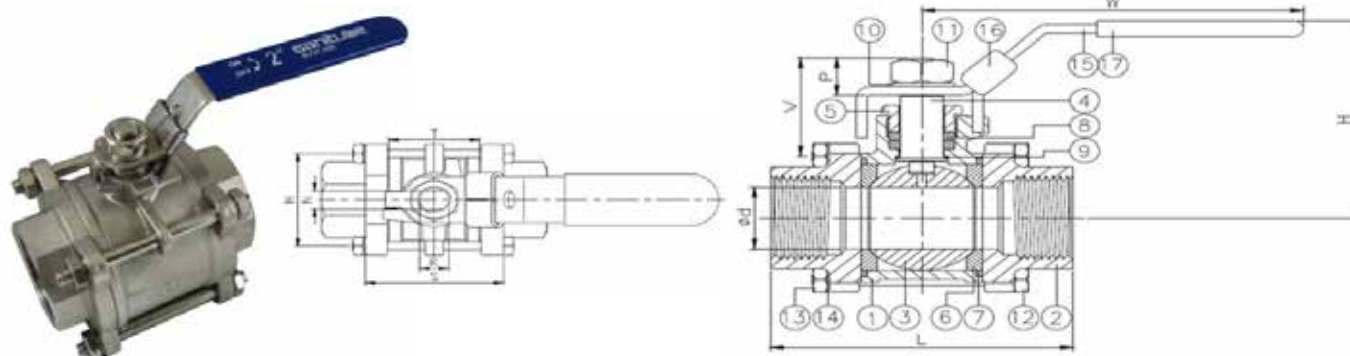

Size (NPS)	Part Number	Dimensions												Weight (lbs.)
		d	D	L	H	W	S	T	M	N	V	P	K	
1/2"	BV3T-050	0.590	0.870	2.600	2.240	4.020	1.500	0.940	1.310	0.200	1.190	0.410	5/16"UNC	1.2
3/4"	BV3T-075	0.790	1.090	3.290	2.600	4.740	1.690	1.100	1.480	0.260	1.440	0.530	3/8"UNC	1.6
1 "	BV3T-100	0.980	1.360	3.740	2.990	6.240	2.130	1.380	1.670	0.310	1.600	0.610	7/16"UNC	2.4
1-1/4"	BV3T-125	1.260	1.690	4.380	3.190	6.240	2.560	1.770	2.000	0.310	1.650	0.610	7/16"UNC	3.8
1-1/2"	BV3T-150	1.500	1.950	5.120	3.860	7.400	2.950	2.170	2.340	0.350	1.910	0.690	1/2"UNC	5.2
2 "	BV3T-200	1.970	2.420	5.940	4.170	7.400	3.460	2.600	2.890	0.350	1.940	0.690	1/2"UNC	7.8
2-1/2"	BV3T-250	2.560	2.910	7.200	5.430	9.650	4.490	3.390	3.790	0.470	2.840	1.300	3/4"UNC	19.6
3 "	BV3T-300	3.150	3.540	8.280	6.060	9.650	5.200	3.940	3.190	0.470	2.580	1.300	3/4"UNC	31.5
4 "	BV3T-400	3.940	4.550	9.230	7.010	12.600	6.220	4.920	4.020	0.630	3.080	1.540	1"UNC	51.6
3 "	BV3T-300	3.150	7.600	5.790	9.650	1.380	0.470	3.090	1.220	1.200	3/4"W	1.200	3/4"W	22.3
4 "	BV3T-400	3.940	10.240	7.200	12.600	1.970	0.630	3.900	2.090	1.650	1"W	1.650	1"W	25.0



Notes:

- Full port.
- Working Pressure:
1000 PSI WOG
(PN63).
- Working Temp.:
-4°F to 300°F.
- Investment casting.
- Blow-out proof stem.
- Anti-static device.
- Locking device.
- Socket weld ends
conform to ANSI
B16.11.

Component	Description	Material
1	Body	T316 Stainless Steel
2	Cap	T316 Stainless Steel
3	Ball	T316 Stainless Steel
4	Stem	T316 Stainless Steel
5	Gland Nut	T304 Stainless Steel
6	Seat	PTFE/RTFE/CTFE
7	Seal	PTFE
8	Packing	PTFE
9	Thrust Washer	PTFE

Component	Description	Material
10	Spring Washer	T304 Stainless Steel
11	Stem Nut	T304 Stainless Steel
12	Bolt	T304 Stainless Steel
13	Bolt Nut	T304 Stainless Steel
14	Spring Washer	T304 Stainless Steel
15	Handle	T304 Stainless Steel
16	Locking Device	T304 Stainless Steel
17	Handle Sleeve	PVC

Three Piece Socket Weld Ball Valves

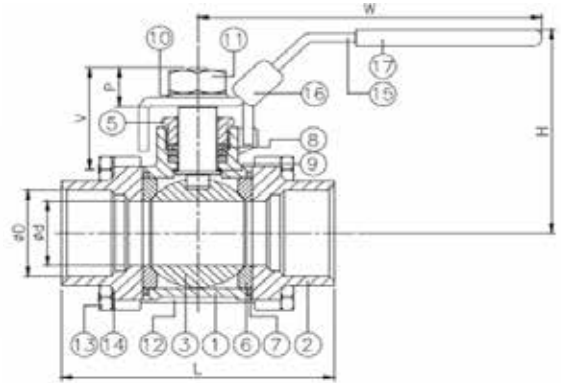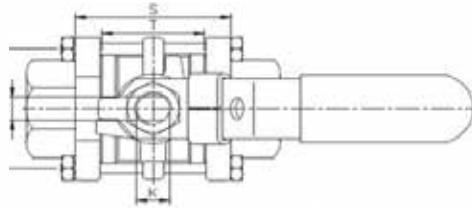

Size (NPS)	Part Number	Dimensions												Weight (lbs.)
		d	D	L	H	W	S	T	M	N	V	P	K	
1/2"	BV3S-050	0.870	0.870	2.600	2.240	4.020	1.500	0.940	1.310	0.200	1.190	0.410	5/16"UNC	1.2
3/4"	BV3S-075	1.090	1.090	3.290	2.600	4.740	1.690	1.100	1.480	0.260	1.440	0.530	3/8"UNC	1.6
1 "	BV3S-100	1.360	1.360	3.740	2.990	6.240	2.130	1.380	1.670	0.310	1.600	0.610	7/16"UNC	2.4
1-1/4"	BV3S-125	1.690	1.690	4.380	3.190	6.240	2.560	1.770	2.000	0.310	1.650	0.610	7/16"UNC	3.8
1-1/2"	BV3S-150	1.950	1.950	5.120	3.860	7.400	2.950	2.170	2.340	0.350	1.910	0.690	1/2"UNC	5.2
2 "	BV3S-200	2.420	2.420	5.940	4.170	7.400	3.460	2.600	2.890	0.350	1.940	0.690	1/2"UNC	7.8
2-1/2"	BV3S-250	2.910	2.910	7.200	5.430	9.650	4.490	3.390	3.790	0.470	2.840	1.300	3/4"UNC	19.6
3 "	BV3S-300	3.540	3.540	8.280	6.060	9.650	5.200	3.940	3.190	0.470	2.580	1.300	3/4"UNC	31.5
4 "	BV3S-400	4.550	4.550	9.230	7.010	12.600	6.220	4.920	4.020	0.630	3.080	1.540	1"UNC	51.6

Notes:

- Full port.
- Working Pressure: 1000 PSI WOG (PN63).
- Working Temp.: -4°F to 300°F.
- Investment casting.
- Blow-out proof stem.
- Anti-static device.
- Locking device.
- Socket weld ends conform to ANSI B16.11.

Component	Description	Material
1	Body	T316 Stainless Steel
2	Cap	T316 Stainless Steel
3	Ball	T316 Stainless Steel
4	Stem	T316 Stainless Steel
5	Gland Nut	T304 Stainless Steel
6	Seat	PTFE/RTFE/CTFE
7	Seal	PTFE
8	Packing	PTFE
9	Thrust Washer	PTFE

Component	Description	Material
10	Spring Washer	T304 Stainless Steel
11	Stem Nut	T304 Stainless Steel
12	Bolt	T304 Stainless Steel
13	Bolt Nut	T304 Stainless Steel
14	Spring Washer	T304 Stainless Steel
15	Handle	T304 Stainless Steel
16	Locking Device	T304 Stainless Steel
17	Handle Sleeve	PVC

Part Description	Sanitube™	Dixon	Alfa Laval	SPX	VNE	Top Line	Andron
Elbow 90° Wld. w/ Tangent	L2S	B2S	L2S	2CW	EG2S	L2S	A2S
Elbow 90° Wld. NO Tangent	2WC	B2WCL	2WCL	2WCL	--	2WCL	A2SX
Elbow 90° Wld. x Clamp	L2CM	B2CM	L2CM	2CKW	EGC2	L2CM	AC2C31
Elbow 90° Wld. x BS Thrd.	L2C	B2C	L2C	2TW	EG2T	L2C	A2C
Elbow 90° Wld. x BS Male	L2F	B2F	L2F	L2F	EG2F	L2F	A2F
Elbow 45° Wld. w/ Tangent	L2KS	B2KS	L2KS	2KW	EG2KS	L2KS	A2KS
Elbow 45° Wld. NO Tangent	2WK	B2WK	2WK	B2WK	EG2WK	2WK	A2KSX
Elbow 45° Wld. x Clamp	L2KM	B2KM	L2KM	2KKW	EG2KC	L2KM	AC2KC
Elbow 45° Wld. x BS Thrd.	L2K	B2K	L2K	2KT	E2K	L2K	A2K
Elbow 45° Wld. x BS Male	L2P	B2KP	L2P	2KP	E2P	L2P	A2P
U-Bend 180° Wld.	2WU	B2WUL	L2WU	2WU	E2WU	L2WU	A2WU
Tee Wld. (LONG)	7WL	B7WWM	L7W	7W	E7W	L7W	A7W
Tee Wld. (SHORT)	7WS	B7WWW	L7WWW	7WWW	E7WWW	L7WWW	
Tee Wld. x Clamp Br.	7WWM	B7WWM	L7WWM	7WWK	E7WWM	L7WWM	A7WWM
Tee Wld. x BS Thrd. Br.	7WWT	B7WWT	L7WWT	7WWT	E7WWT	L7WWT	--
Tee Wld. x Wld. Br. x Clamp	7WMW	B7WMW	L7WMW	7WKW	E7WMW	L7WMW	A7WMW
Tee Wld. x Wld. Br. x BS Thrd.	7WTW	B7WTW	L7WTW	7WTW	E7WTW	L7WTW	--
Tee Wld. x Clamp Br. x Clamp	7WMM	B7WMM	L7WMM	7WKK	E7WMM	L7WMM	A7WMM
Tee Wld. x BS Thrd. x BS Thrd.	7WTT	B7WTT	L7WTT	7WTT	E7WTT	L7WTT	--
Tee Clamp x Wld. Br.	7MMW	B7CCW	L7MMW	7KKW	E7MMW	L7MMW	A7MMW
Tee BS Thrd. x Wld. Br.	7TTW	B7TTW	L7TTW	7TTW	E7TTW	L7TTW	--
Tee Reducing Wld.	7WRT	B7RWWW	L7RWWW	7WR	E7RWWW	L7RWWW	A7WR
Cross Wld.	9WWWW	B9WWWW	L9WWWW	9W	E9WWWW	L9WWWW	A9W
Conc. Wld.	31W	B31W	L31	31W	E31W	L31	A31W
Ecc. Wld.	32W	B32W	L32	32W	E32W	L32	A32W
Lateral Y Wld.	28WA	B28WA	L28WA	28WA	E28WA	L28WA	A28WA
True Y Wld.	28W	B28WB	L28WB	28WB	E28WB	L28WB	A28B

CLAMP FITTINGS CROSS REFERENCE CHART

Part Description	Sanitube™	Dixon	Alfa Laval	SPX	VNE	Top Line	Andron
Elbow 90° Clamp	2CMP	B2CMP	2CMP	2CMP	EG2C	2CMP	AC2SX
Elbow 90° Reducing Clamp	2CMP-31MP	B3114MP	2CMP-31MP	2CMP-31MP	EG2C-31	2CMP-31MP	AC2C31
Elbow 90° Clamp x Male BS Nut	2FMP-14	B2FMP-14	2FMP-14	2FMP-14	EG2FPR	2FMP-14	AC214F
U-Bend 180° Clamp	2WUMP	B2WUMP	--	--	EG2WU	2WUMP	AC2U
Elbow 90° Clamp x BS Thrd.	2FMP-15	B2FMP-15	2FMP-15	2FMP-15	EG2FTR	2FMP-15	AC215F
Elbow 45° Clamp	2KMP	B2KMP	2KMP	2KMP	EG2K	2KMP	AC2KSX
Tee Clamp	7MP	B7MP	7MP	7MP	EG7	7MP	AC7
Tee Reducing Clamp	7RMP	B7RMP	7RMP	7RMP	EG7R	7RMP	AC7R
Cross Clamp	9MP	B9MP	9MP	9MP	EG9	9MP	AC9
Clamp Sanitary Hvy. Duty	13MHHM	13MHHM	13MHHM	13MHHM	13MHHM	13MHHM	AC13HH
Clamp Sanitary High Pressure	13MHP	13MHP	13MHP	13MHP	13MHP	13MHP	AC13HP
Adptr. Clamp x Tygon Hose	14MPHT	14MPHT	14MPHT	14MPHT	EG14HT	14MPHT	AC14AHT
Ferrule Clamp Tank Wld.	14MPW	14MPW	14MPW	14MPW	EG14W	14MPW	AC14H
Ferrule Clamp Tank Wld. Light	14WLMP	14WLMP	14WLMP	14WLMP	EG14WL	14WLMP	AC14WL
Ferrule Clamp Long	14AM7	14AM7	L14AM7	L14AM7	EG14AM7	L14AM7	AC14A
Ferrule Clamp Short	14WMP	14WMP	14WMP	14WMP	EG2CS	14WMP	AC14X
Ferrule Clamp Recessless	14RMP	14RMP	14RMP	14RMP	EG14R	14RMP	AC14R
Adptr. Clamp x Hose Barb	14MPHR	14MPHR	14MPHR	14MPHR	EG14RT	14MPHR	AC14AHR
Cap Clamp	16AMP	GC16A	16AMP	16AMP	EG16A	16AMP	AC16
Adptr. Clamp x Male BS Nut	17MP-14	17MP-14	17MP-14	17MP-14	EG17PR	17MP-14	AC1714
Adptr. Clamp x Thrd. BS	17MP-15	17MP-15	17MP-15	17MP-15	EG17TR	17MP-15	AC1715
Adptr. Clamp X Male NPT	21MP	21MP	21MP	21MP	EG21	21MP	AC21
Adptr. Clamp X Fml. NPT	22MP	22MP	22MP	22MP	EG22	22MP	AC22
Clamp x Clamp Conc.	3114MP	B3114MP	31-14MP	31-14MP	EG31CC	31-14MP	AC31
Clamp x Clamp Ecc.	3214MP	B3214MP	32-14MP	32-14MP	EG32CC	32-14MP	AC32
Cap Thermometer x Clamp	23BMP	B23BMP	23BMP	23BMP	EG23B	23BMP	AC23
Lateral Y Clamp	28AMP	B28AMP	28AMP	28AMP	EG28A	28AMP	AC28WA
True Y Clamp	28BMP	B28BMP	28BMP	28BMP	EG28B	28BMP	AC28B

Part Description	Sani- tube™	Dixon	Alfa Laval	SPX	VNE	Top Line	Andron
Elbow 90° BS Thrd.	2C	B2C	2C	2C	E2C	2C	2C
Elbow 90° Male BS Nut	2E	B2E	2E	2E	E2E	2E	2E
Elbow 90° BS Thrd. x Male Nut	2F	B2F	2F	2F	E2F	2F	2F
Elbow 45° BS Thrd.	2K	B2K	2K	2K	E2K	2K	2K
Elbow 45° BS Thrd. x Male Nut	2P	B2P	2P	2P	E2P	2P	2P
Tee BS Thrd.	7	7	7	7	E7	7	7
Tee BS Thrd. x Male BS Nut Br.	7A	7A	7A	7A	E7A	7A	7A
Tee BS Thrd. x Male BS Nut Run	7B	7B	7B	7B	E7B	7B	7B
Cross BS Thrd.	9	9	9	9	E9	9	9
BS Nut	13H	13H	13H	13H	13H	13H	13H
Ferrule Recessed Male BS	14	14	14	14	14	14	14
Ferrule Wld. Male BS	14A	14A	L14A7	14A	E14A	L14A7	14A
Adptr. Male BS x Hose Barb	14AHR	14AHR	14AHR	14AHR	14AHR	14AHR	14AHR
Adptr. Male BS x Tygon Hose	14AHT	14AHT	14AHT	14AHT	14AHT	14AHT	14AHT
Ferrule Recessless Male BS	14R	14R	14R	14R	14R	14R	14R
Ferrule Male BS Tank Wld. Hvy.	14W	14W	14W	14W	14W	14W	14W
Adptr. Male BS Nut x Fml. NPT	14-22	14-22	14-22	14-22	14-18	14-22	14-18
Ferrule Male BS Tank Wld. Long	14WL	14WL	14WL	14WL	14WL	14WL	14WL
Adptr. Male BS Nut x Male NPT	14-19	21F	14-19	21F	14-19	14-19	14-19
Ferrule Male BS Short	14PRF	14PRF	14PRF	14RW	14PRF	14PRF	14WF
Ferrule Recessed BS Thrd.	15	15	15	15	15	15	15
Ferrule Short Wld. BS Thrd.	15TRF	15TRF	15TRF	15RW	15TR	15TRF	15WF
Ferrule Wld. BS Thrd.	15A	15A	L15A7	15A	EG15A7	L15A7	15A
Adptr. BS Thrd. x Hose Barb	15AHR	15AHR	15AHR	15AHR	15AHR	15AHR	15AHR
Adptr. BS Thrd. x Tygon Hose	15AHT	15AHT	15AHT	15AHT	15AHT	15AHT	15AHT
Ferrule Recessless BS Thrd.	15R	15R	15R	15R	15R	15R	15R
Ferrule BS Thrd. Tank Wld. Hvy.	15W	15W	15W	15W	15W	15W	15W
Ferrule BS Thrd. Tank Wld. Long	15WL	15WL	15WL	15WL	15WL	15WL	15WL
Cap Male BS	16A	16A	16A	16A	16A	16A	16A
Adptr. BS Thrd. x Male NPT	21	21	21	21	21	21	21
Cap Thermometer x Male BS	23B	23B	23B	23B	23B	23B	23B
Adptr. BS Thrd. x Fml. NPT	22	22	22	22	22	22	22
Conc. BS Thrd.	31TT	31TT	31TT	31TT	31TT	31TT	31TT
Conc. Male BS Nut x BS Thrd.	31TP	31TP	31TP	31TP	31TP	31TP	31TP
Conc. Male BS Nut	31-14F	31-14F	31-14F	31-14F	31-14F	31-14F	31-14F
Conc. Male BS x BS Thrd.	31-15F	31-15F	31-15F	31-15F	31-15F	31-15F	31-15F
Ecc. Male BS Nut	32-14F	32-14F	32-14F	32-14F	32-14F	32-14F	32-14F
Ecc. BS Thrd.	32-15F	32-15F	32-15F	32-15F	32-15F	32-15F	32-15F

I-LINE FITTINGS CROSS REFERENCE CHART

Part Description	Sanitube™	Dixon	Alfa Laval	SPX	VNE	Top Line	Andron
Elbow 90° I-Line Male x Fml.	2CI	B2CI	--	2CI	E2CI	2CI	--
Elbow 90° I-Line Fml. x Male	2FI	B2FI	--	2FI	E2FI	2FI	--
Elbow 90° I-Line Male x Male	2EI	B2EI	--	2EI	E2EI	2EI	--
Elbow 45° I-Line Fml. x Fml.	2KI	B2KI	--	2KI	E2KI	2KI	--
Elbow 45° I-Line Fml. x Male	2PI	B2PI	--	2PI	E2PI	2PI	--
Tee I-Line Fml.	7I	B7I	--	7I	E7I	7I	--
Tee I-Line Fml. x Male Br.	7AI	B7AI	--	7AI	E7AI	7AI	--
Tee I-Line Male x Fml. Br.	7EI	B7EI	--	7EI	E7EI	7EI	--
Tee I-Line Fml. x Male Run	7BI	B7BI	--	7BI	E7BI	7BI	--
Cross I-Line Fml.	9I	B9I	--	9I	E9I	9I	--
Clamp I-Line Hvy. Duty	13IS	13ILH	--	13IS	E13IS	13IS	AY13IS
Clamp I-Line Bolted	13IU	13ILB	--	13IU	E13IU	13IU	--
Ferrule I-Line Male Wld. Short	14WI	14WI	--	14WI	E14WI	14WI	AY14WI
Ferrule I-Line Fml. Wld. Short	15WI	15WI	--	15WI	E15WI	15WI	AY15WI
Ferrule I-Line Male Wld. Long	14WLI	14WLI	--	14WLI	E14WLI	14WLI	AY14WLI
Ferrule I-Line Fml. Wld. Long	15WLI	15WLI	--	15WLI	E15WLI	15WLI	AY15WLI
Adptr. I-Line Male x Hose Barb	14HRI	14HRI	--	14HRI	E14HRI	14HRI	AY14AHR
Adptr. I-Line Male x Tygon Hose	14HTI	14HTI	--	14HTI	E14HTI	14HTI	AY14AHT
Adptr. I-Line Fml. x Hose Barb	15HRI	15HRI	--	15HRI	E15HRI	15HRI	AY15AHR
Adptr. I-Line Fml. x Tygon Hose	15HTI	15HTI	--	15HTI	E15HTI	15HTI	AY15AHT
Adptr. I-Line Male x Fml.	17-14I-15I	17-14I-15I	--	17-14I-15I	E17-14-15I	17-14I-15I	--
Adptr. I-Line Male x Male	17-15I-15I	17-15I-15I	--	17-15I-15I	E17-15-15I	17-15I-15I	--
Adptr. I-Line Fml. x Fml.	17-14I-14I	17-14I-14I	--	17-14I-14I	E17-14I-14I	17-14I-14I	--
Adptr. I-Line Fml. x Male BS Nut	17-14I-14	17-14I-14	--	17-14I-14	E17-14I-14I	17-14I-14	--
Adptr. I-Line Fml. x Clamp	17-14I-14MP		--	17-14I-14MP	E17-14I-14MP		--
Adptr. I-Line Fml. x BS Thrd.	17-14I-15	17-14I-15	--	17-14I-15	E17-14I-15	17-14I-15	--
Adptr. I-Line Male x Male BS Nut	17-15I-14	17-15I-14	--	17-15I-14	E17-15I-14	17-15I-14	--
Adptr. I-Line Male x BS Thrd.	17-15I-15I	17-15I-15I	--	17-15I-15I	E17-15I-15	17-15I-15I	--
Adptr. I-Line Male x Clamp	17-15I-14MP		--	17-15I-14MP	E17-15I-14MP		--
Adptr. I-Line Male x Male NPT	21FI-14I	21FI-14I	--	21FI-14I	E21I-14I	21FI-14I	--
Adptr. I-Line Male x Fml. NPT	21F1-15I	21F1-15I	--	21F1-15I	E21I-15I	21F1-15I	--
Adptr. I-Line Fml. x Male NPT	22FI-14I	22FI-14I	--	22FI-14I	E22I-14I	22FI-14I	--
Adptr. I-Line Fml. x Fml. NPT	22FI-15I	22FI-15I	--	22FI-15I	E22I-15I	22FI-15I	--
Cap I-Line Male	16AI-14I	16AI-14I	--	16AI-14I	E16AI-14I	16AI-14I	AY16AI-14
Cap I-Line Fml.	16AI-15I	16AI-15I	--	16AI-15I	E16AI-15I	16AI-15I	AY16AI-15
Conc. I-Line Male	31I-14FI	31I-14FI	--	31I-14FI	E31I-14I	31I-14FI	--
Conc. I-Line Fml.	31I-15FI	31I-15FI	--	31I-15FI	E31I-15I	31I-15FI	--
Conc. I-Line Male (Lrg.) x Fml.	31I-15I-14I	31I-15I-14I	--	--	E31I-15I-14I	--	--
Conc. I-Line Male (Sml.) x Fml.	31I-14I-15I	31I-14I-15I	--	--	E31I-14I-15I	--	--
Ecc. I-Line Male	32I-14FI	32I-14FI	--	32I-14FI	E32I-14I	32I-14FI	--
Ecc. I-Line Fml.	32I-15FI	32I-15FI	--	32I-15FI	E32I-145I	32I-15FI	--

The information contained in these tables was derived from several sources and is to be used as a general guide only. Compounds suitable for any specific application rests solely by the end user. Sanitube assumes no responsibility. All effect ratings assume static conditions at ambient temperatures.

Guide:

A = Satisfactory

B = Fair

C = Severe Effect (except for some static applications)

D = Unsatisfactory

E = Insufficient Information

Fluid	Material				
	Buna	EPDM	Viton®	Teflon®	Silicone
Acetaldehyde	D	A	D	A	B
Acetamide	A	A	B	A	B
Acetic Acid, 30%	B	A	B	A	A
Acetone	D	A	D	A	C
Acetophenone	D	A	D	A	D
Acetyl Chloride	D	D	A	A	C
Acetylene	A	A	A	A	B
Acrylonitrile	D	D	C	A	D
Adipic Acid	A	A	E	E	E
Ammonia Gas (cold)	A	A	D	A	A
Ammonium Chloride (aq)	A	A	A	A	E
Ammonium Hydroxide (conc.)	D	A	B	A	A
Ammonium Nitrate (aq)	A	A	E	A	E
Ammonium Nitrite (aq)	A	A	E	E	B
Ammonium Phosphate (aq)	A	A	E	A	A
Ammonium Sulfate (aq)	A	A	D	A	E
Amyl Acetate (Banana Oil)	D	A	D	A	D
Amyl Alcohol	B	A	B	A	D
Amyl Borate	A	D	A	A	E
Arsenic Acid	A	A	A	E	A
Arsenic Trichloride (aq)	A	C	E	E	E
Barium Chloride (aq)	A	A	A	A	A
Barium Hydroxide (aq)	A	A	A	A	A
Barium Sulfate (aq)	A	A	A	A	A
Barium Sulfide (aq)	A	A	A	A	A
Benzaldehyde	D	A	D	A	B

COMPOUND SELECTION GUIDE

Fluid	Material				
	Buna	EPDM	Viton®	Teflon®	Silicone
Benzene	D	D	A	A	D
Benzoic Acid	C	C	A	A	C
Benzoyl Chloride	D	D	A	A	E
Benzyl Alcohol	D	A	A	A	B
Benzyl Chloride	D	D	A	A	D
Boric Acid	A	A	A	A	A
Brine	A	A	A	A	A
Bromine, Anhydrous	D	D	A	E	D
Bromine Water	D	B	A	E	D
Butadiene	D	C	A	A	D
Butane	A	D	A	A	D
Butyl Acetate	D	C	D	E	D
Butyl Acetyl Ricinoleate	C	A	A	E	E
Butyl Alcohol	A	B	A	A	B
Butyl Amine	C	B	D	E	D
Butyl Benzoate	D	B	A	E	E
Butyl Carbitol	D	A	A	A	D
Butyl Cellosolve	D	A	D	A	E
Butyl Oleate	D	B	A	E	E
Butyl Stearate	B	C	A	E	E
Butylene	B	D	A	E	D
Butyraldehyde	D	B	D	E	D
Carbolic Acid (Phenol)	D	B	A	A	D
Carbon Bisulfide	C	D	A	E	D
Carbon Dioxide	A	B	A	E	B
Carbonic Acid	B	A	A	E	A
Carbon Monoxide	A	A	A	A	A
Carbon Tetrachloride	C	D	A	A	D
Castor Oil	A	B	A	A	A
Cellosolve Acetate	D	B	D	A	D
China Wood Oil (Tung Oil)	A	C	A	A	D
Chlorine (wet)	D	C	A	A	D
Chlorine Dioxide	D	C	A	A	E

Fluid	Material				
	Buna	EPDM	Viton®	Teflon®	Silicone
Chloroacetic Acid	D	A	D	A	E
Chloroacetone	D	A	D	E	D
Chlorobenzene	D	D	A	E	D
Chlorobromomethane	D	B	A	E	D
Chloroform	D	D	A	A	D
Chlorotoluene	D	D	A	E	D
Chrome Plating Solutions	D	C	A	A	C
Chromic Acid	D	B	A	A	B
Cod Liver Oil	A	A	A	A	B
Copper Acetate (aq)	B	A	D	E	D
Copper Chloride (aq)	A	A	A	A	A
Copper Cyanide (aq)	A	A	A	A	A
Copper Sulfate (aq)	A	A	A	A	A
Creosote (coal tar)	A	D	A	A	D
Cresylic Acid	D	D	A	E	D
Cyclohexane	A	D	A	A	D
Cyclohexanol	C	C	A	E	D
Cyclohexanone	D	B	D	E	D
Denatured Alcohol	A	A	A	A	A
Detergent Solutions	A	A	A	A	A
Diacetone Alcohol	D	A	D	A	B
Dibenzyl Ether	D	B	D	A	E
Dibenzyl Sebecate	D	B	B	E	C
"Dibromoethyl Benzene					
(Alkazene)"	D	D	B	E	D
Dibutyl Amine	D	C	D	E	C
Dibutyl Ether	D	C	C	E	D
Dibutyl Phthalate	D	B	C	A	B
Dibutyl Sebecate	D	B	B	E	B
O-Dichlorobenzene	D	D	A	E	D
Dichloro-Isopropyl Ether	D	C	C	E	D
Diethylamine	B	B	D	A	B
Diethyl Benzene	D	D	A	E	D

Fluid	Material				
	Buna	EPDM	Viton®	Teflon®	Silicone
Diethyl Ether	D	D	D	E	D
Diethylene Glycol	A	A	A	E	B
Diethyl Sebecate	B	B	B	E	B
Diisobutylene	B	D	A	E	D
Diisopropyl Benzene	D	D	A	E	E
Diisopropyl Ketone	D	A	D	E	D
Diisopropylidene Acetone	D	C	D	E	D
Dimethyl Aniline (Xylidine)	C	B	D	E	D
Dimethyl Ether (Methyl Ether)	A	D	A	E	A
Dimethyl Formamide	B	B	D	E	B
Dimethyl Phthalate	D	B	B	E	E
Dinitrotoluene	D	D	D	E	D
Diethyl Phthalate	C	B	B	E	C
Diethyl Sebecate	D	B	B	E	C
Dioxane	D	B	D	E	D
Dioxolane	D	B	D	E	D
Dipentene	A	D	A	E	D
Diphenyl (Phenylbenzene)	D	D	A	E	D
Diphenyl Oxides	D	D	A	E	C
Dowtherm Oil	D	D	A	A	C
Ethane	A	D	A	A	D
Ethanolamine	B	B	D	E	B
Ethyl Acetate	D	B	D	E	B
Ethyl Acetoacetate	D	B	D	E	B
Ethyl Acrylate	D	B	D	E	B
Ethyl Alcohol	A	A	C	A	A
Ethyl Benzene	D	D	A	A	D
Ethyl Benzoate	D	A	A	A	D
Ethyl Cellosolve	D	B	D	E	D
Ethyl Cellulose	B	B	D	A	C
Ethyl Chloride	A	C	A	A	D
Ethyl Chlorocarbonate	D	B	A	A	D
Ethyl Chloroformate	D	B	D	E	D

Fluid	Material				
	Buna	EPDM	Viton®	Teflon®	Silicone
Ethyl Ether	C	C	D	A	D
"Ethyl Penta- chlorobenzene"	D	D	A	A	D
Ethylene	A	B	A	A	E
Ethylene Chloride	D	C	B	E	D
Ethylene Diamine	A	A	D	E	A
Ethylene Dichloride	D	C	A	A	D
Ethylene Glycol	A	A	A	A	A
Fluoroboric Acid	A	A	E	E	E
Freon 11	B	D	A	A	D
Freon 12	A	B	B	A	D
Freon 22	D	A	D	A	D
Fumaric Acid	A	B	A	E	B
Gallic Acid	B	B	A	A	E
Gasoline	B	D	A	A	D
Glucose	A	A	A	A	A
Glycerin	A	A	A	A	A
Hexane	A	D	A	A	D
Hexyl Alcohol	A	C	A	A	B
Hydrazine	B	A	D	A	C
Hydrobromic Acid	D	A	A	E	D
Hydrocyanic Acid	B	A	A	A	C
Hydrofluoric Acid (conc.) cold	D	C	A	A	D
Hydrofluosilicic Acid	B	B	A	E	D
Hydrogen Gas	A	A	A	A	C
Hydrogen Peroxide -0.9	D	B	B	E	B
Hydrogen Sulfide (wet) cold	D	A	D	E	C
Hydroquinone	C	B	B	A	E
Iodoform	E	D	E	E	E
Isobutyl Alcohol	B	A	A	A	A
Isooctane	A	D	A	E	D
Isopropyl Acetate	D	B	D	A	D
Isopropyl Alcohol	B	A	A	A	A
Isopropyl Chloride	D	D	A	A	D

COMPOUND SELECTION GUIDE

Fluid	Material				
	Buna	EPDM	Viton®	Teflon®	Silicone
Isopropyl Ether	B	D	D	A	D
Kerosene	A	D	A	A	D
Lacquers	D	D	D	A	D
Lactic Acid (cold)	A	A	A	A	A
Lead Acetate (aq)	B	A	D	E	D
Lead Nitrite (aq)	A	A	E	E	B
Lime Bleach	A	A	A	E	B
Linoleic Acid	B	D	B	A	B
Maleic Acid	D	B	A	A	E
Malic Acid	A	B	A	E	B
Methane	A	D	B	A	D
Methyl Acetate	D	A	D	A	D
Methyl Acrylate	D	B	D	A	D
Methylacrylic Acid	D	B	D	E	D
Methyl Alcohol	A	A	D	A	A
Methyl Bromide	B	D	A	A	E
Methyl Butyl Ketone	D	A	D	A	C
Methyl Cellosolve	C	B	D	A	D
Methyl Chloride	D	C	B	A	D
Methyl Cyclopentane	D	D	B	E	D
Methylene Chloride	D	C	B	E	D
Methyl Ether	A	D	A	A	A
Methyl Ethyl Ketone	D	A	D	A	D
Methyl Isobutyl Ketone	D	B	D	A	D
Methyl Methacrylate	D	C	D	A	D
Milk	A	A	A	A	A
Mineral Oil	A	C	A	C	B
Monoethanol Amine	D	A	D	E	B
Monomethyl Ether	A	D	A	E	A
Monovinyl Acetylene	A	A	A	A	B
Mustard Gas	E	A	E	E	A
Naphthalenic Acid	B	D	A	A	D
Natural Gas	A	D	A	A	A

Fluid	Material				
	Buna	EPDM	Viton®	Teflon®	Silicone
Nickel Acetate (aq)	B	A	D	E	D
Nickel Chloride (aq)	A	A	A	A	A
Nickel Sulfate (aq)	A	A	A	A	A
Nitric Acid (dilute)	D	B	A	A	B
Nitrobenzene (Ligroin)	A	D	A	A	D
Nitroethane	D	B	D	A	D
Nitrogen Tetroxide	D	C	D	A	D
Octachlorotoluene	D	D	A	E	D
Octadecane	A	D	A	E	D
N-Octane	B	D	A	A	D
Octyl Alcohol	B	C	A	A	B
Oleic Acid	C	D	B	A	D
Oxalic Acid	B	A	A	E	B
Oxonia	D	A	A	E	A
Oxygen - Cold	B	A	A	A	A
Ozone	D	A	A	E	A
Palmitic Acid	A	B	A	E	D
Perchloric Acid	D	B	A	E	D
Phenyl Ethyl Ether	D	D	D	E	D
Phosphoric Acid - 0.2	B	A	A	E	B
Phosphorus Trichloride	D	A	A	A	E
Piperidine	D	A	D	E	D
Polyvinyl Acetate Emulsion	E	A	E	E	E
Potassium Acetate (aq)	B	A	D	E	D
Potassium Chloride (aq)	A	A	A	A	A
Potassium Cyanide (aq)	A	A	A	A	A
Potassium Nitrate (aq)	A	A	A	A	A
i-Propyl Acetate	D	B	D	E	D
Propyl Nitrate	D	B	D	E	D
Propylene	D	D	A	A	D
Pyridine	D	B	D	E	D
Salicylic Acid	B	A	A	E	E
Silicone Oils	A	A	A	A	C

Fluid	Material				
	Buna	EPDM	Viton®	Teflon®	Silicone
Soap Solutions	A	A	A	A	A
Sodium Acetate (aq)	B	A	D	E	D
Sodium Bicarbonate (aq)	A	A	A	A	A
Sodium Borate (aq)	A	A	A	A	A
Sodium Chloride (aq)	A	A	A	A	A
Sodium Hydroxide (aq)	B	A	B	A	B
Sodium Nitrate (aq)	B	A	E	E	D
Sodium Peroxide (aq)	B	A	A	E	D
Soybean Oil	A	C	A	A	A
Steam, under 300°F	D	A	D	A	C
Stearic Acid	B	B	E	A	B
Stoddard Solvent	A	D	A	A	D
Sulfur Chloride (aq)	C	D	A	B	C
Sulfuric Acid (dilute)	C	B	A	E	D
Sulfurous Acid	B	B	A	A	D
Tannic Acid	A	A	A	A	B
Tartaric Acid	A	B	A	A	A
Tetrachloroethylene	D	D	A	A	D
Toluene	D	D	A	A	D
Triethanol Amine	B	A	D	A	E
Trioctyl Phosphate	D	A	B	E	C
Tung Oil (China Wood Oil)	A	C	A	A	D
Turpentine	A	D	A	A	D
Vegetable Oils	A	C	A	A	B
Vinegar	B	A	A	A	A
Whiskey, Wines	A	A	A	A	A
White Pine Oil	B	D	A	E	D
Zinc Chloride (aq)	A	A	A	A	A

Part Prefix	Page Number	Part Prefix	Page Number	Part Prefix	Page Number
13H	50	16AMP4	31	2FI4	66
13ILB	64	16AMP6	31	2FI6	66
13IS	64	16W4P	17	2CMP31MP4	32
13MHM	30	16W6P	17	2CMP31MP6	32
13MHP	30	19MPV4	43	2FMP144	33
14A4	49	19MPV6	43	2K4	53
14A6	49	19MPX4	43	2KMP4	36
14AHR4	59	19MPX6	43	2KMP6	36
14AHT4	58	19WB4	18	2P4	53
14AM74	24	19WB6	18	2SXL124	21
14AM76	24	19WX4	18	2SXL126	21
14MPHR4	29	19WX6	18	2SXL184	21
14MPHR6	29	21MP4	41	2SXL186	21
14MPHT4	26	21MP6	41	2SXL244	22
14MPHT6	26	22MP4	42	2SXL246	22
14MPW6	27	22MP6	42	2SXL364	22
14RMP4	27	23BMP6	28	2SXL366	22
14VB6	17	28AMP4	44	2UMP4	45
14WI4	63	28AMP6	44	2UMP6	45
14WI6	63	28BMP4	45	2WC4P	10
14WL4	57	28BMP6	45	2WC6P	10
14WLMP4	25	28W4P	19	2WK4P	12
14WLMP6	25	28W6P	19	2WK6P	12
14WMP4	24	28WA4P	19	2WUL4P	20
14WMP6	24	28WA6P	19	2WUL6P	20
15A4	49	2C4	52	3114F4	54
15A6	49	2CI4	65	3114MP4	37
15AHR4	59	2CI6	65	3114MP6	37
15AHT4	58	2CMP4	31	3115F4	54
15WL4	57	2CMP6	31	31TT4	55
15WI4	63	2E4	51	31W4P	14
15WI6	63	2EI4	65	31W6P	14
16A4	50	2EI6	65	31WMP4	25
16A6	50	2F4	52	31WMP6	25

PART NUMBER INDEX

Part Prefix	Page Number	Part Prefix	Page Number	Part Prefix	Page Number
3214MP4	38	9W4P	20	SRH	69
3214F4	56	9W6P	20	STC	69
3215F4	56	A269	7	STL14AM76PL	26
3214MP6	38	A270	6	T24	67
32W4P	15	A312	8	T24RG	67
32W6P	15	AW2S6P	11	TCBFE	78
38SL4	72	BV1	86	TCBFS4	79
38SL6	72	BV2T	87	TCBFV	78
45BY6	83	BV3S	89	TCBFESR	80
74	60	BV3T	88	TCBFVSR	80
7A4	60	BWBFE	77	TCBVS	81
7B4	61	BWBFBV	77	TCBVS3L	82
7MMW4	35	FLGTC4	44	TCCV	84
7MMW6	35	FLGTC6	44	TCSG	47
7MP4	33	GBST	51		
7MP6	33	GTCB	47		
7MPS4	34	GTCE	47		
7MPS6	34	GTCT	47		
7RMP4	39	GTCV	47		
7RMP6	39	L2CM4	32		
7RMPS4	40	L2CM6	32		
7RMPS6	40	L2KM4	36		
7WL4P	12	L2KM6	36		
7WL6P	12	L2KS4P	13		
7WMM4	35	L2KS6P	13		
7WMM6	35	L2S4P	10		
7WRT4P	16	L2S6P	10		
7WRT6P	16	P24	68		
7WS4P	11	P41	73		
7WS6P	11	P61	73		
7WWM4	34	RST	71		
7WWM6	34	SPOOL4	46		
9MP4	46	SPOOL6	46		
9MP6	46	GBSB	51		

Sanitube LLC (herein called Sanitube) warrants the products described herein to be free from defects in material and workmanship for a period of ninety (90) days from date of shipment by Sanitube under normal use and service. Sanitube's sole obligation under this warranty is limited to replacing, as hereinafter provided, any stock (not special order or fabricated) product found to Sanitube's satisfaction to be defective upon examination by Sanitube, provided that such product shall be returned for inspection to Sanitube within thirty (30) days after discovery of the defect. The replacement of defective products will be made without charge for parts. This warranty shall not apply to: (a) any product that has been subject to abuse, negligence, accident, or misapplication; (b) any product altered or repaired by a party not exclusively authorized by Sanitube; and (c) normal maintenance services or the replacement of service items (such as gaskets and seats) made in connection with such services. To the extent permitted by State and Federal law, this limited warranty shall extend only to the buyer and any other person reasonably expected to use or consume the warranted goods. Sanitube disclaims any and all liability for injury to persons or property, or other damages of any nature, including special, indirect, consequential, compensatory, and punitive damages, directly or indirectly resulting from the performance operation, or the failure to operate, of any equipment or process. No action may be brought against Sanitube for an alleged breach of warranty unless such action is instituted within ninety (90) days from the date the cause of action accrues. This limited warranty shall be construed and enforced to the fullest extent allowable by applicable State and Federal law.

OTHER THAN THE OBLIGATION OF SANITUBE SET FORTH HEREIN, SANITUBE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND ANY OTHER OBLIGATION OR LIABILITY. THE FOREGOING CONSTITUTES SANITUBE'S SOLE OBLIGATION WITH RESPECT TO DAMAGES, WHETHER DIRECT, INCIDENTAL OR CONSEQUENTIAL, RESULTING FROM THE USE OR PERFORMANCE OF THE PRODUCT.

sanitube™

Stainless Steel Tube, Valves and Fittings

www.sanitube.us | +1 855 300 TUBE
(8823)

email inquiries@sanitube.us

mailing PO Box 2447
Eaton Park, FL 33840

California 7825 Somerset Blvd, Unit F
Paramount, CA 90723

Florida 120 Contractors Way
Lakeland, FL 33801

Missouri 6127 Deramus Avenue
Kansas City, MO 64120